



SPLIT-TYPE AIR CONDITIONERS

Changes for the Better

Mitsubishi
Electric
EQ quality

Wrap Yourself in Comfort and Quiet
Eco-conscious Technologies from Japan

Full Product Line Catalogue
2016

for a greener tomorrow



P

SERIES



SELECTION

Line-up includes a selection of eight indoor units and four series of outdoor units.
Easily construct a system that best matches room air conditioning needs.

STEP 1 SELECT INDOOR UNIT

Select the optimum indoor unit and capacity based on room size and shape.



STEP 2 SELECT OUTDOOR UNIT

The best outdoor unit for the system depends on the combination of functions desired (e.g. energy savings, system capacity, long pipe length). Check the specifications of the system you need, and then select the optimum outdoor unit series.

Power Inverter



PUHZ-ZRP100/125/140/200/250 PUHZ-ZRP60/71 PUHZ-ZRP35/50

Standard Inverter



PUHZ-P200/250 PUHZ-P125/140 PUHZ-P100 SUZ-KA50/60/71* SUZ-KA35*

* Some indoor units cannot be used with this unit.

To confirm compatibility with the MXZ Series, refer to the MXZ Series page.

STEP 3 SELECT COMBINATION

Choose the installation pattern for the indoor units. (In the case of a multi-system, distribution piping is necessary, so please select the necessary piping as well.)

Single System




Simultaneous Multi-System


Twin Allows simultaneous operation of two indoor units on one floor.



Triple Can cover a large-scale space or dispersed installation on the same floor.



Quadruple Realises the optimum temperature distribution even in a large space.

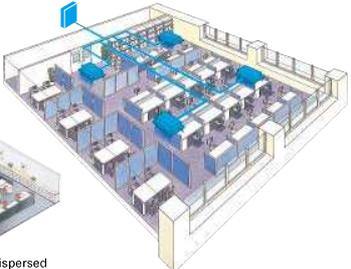

Connectable Combinations for Inverter Units (PUHZ-ZRP / PUHZ-RP / PUHZ-P)


Outdoor Unit Capacity	Indoor Unit Capacity		
	Twin 50 : 50	Triple 33 : 33 : 33	Quadruple 25 : 25 : 25 : 25
71	35 × 2	—	—
100	50 × 2	—	—
125	60 × 2	—	—
140	71 × 2	50 × 3	—
200	100 × 2	60 × 3	50 × 4
250	125 × 2	71 × 3	60 × 4
Distribution Pipe	MSDD-50TR-E MSDD-50WR-E	MSDT-111R-E	MSDF-1111R-E

Notes: 1) Indoor unit combinations with floor-standing (PS) units and other types are impossible.
2) The distribution pipe listed is required for simultaneous multi-systems.



Power Inverter SERIES


Our new Power Inverter Series is designed to achieve industry-leading seasonal energy-efficiency through use of new technologies and high-performance compressor. Installation is now even easier thanks to outdoor units with a side-flow configuration, a maximum piping length of 120m and pipe-replacement technologies.

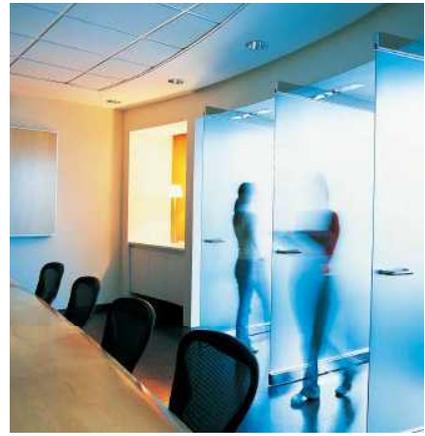

Industry-leading Energy Efficiency in New Seasonal Ratings

Industry-leading energy efficiency has been achieved through optimisation of a newly designed compressor and use of the latest energy-saving technologies. The new Power Inverter Series, designed to realise outstanding seasonal energy-efficiency, achieves high energy-efficiency rankings of A+ or A++ for both cooling and heating in most categories. Annual power consumption has been drastically reduced to realise savings in operating cost.

Annual electricity consumption comparison (PLA-ZRP/PUHZ-ZRP vs PLA-RP/PUHZ-RP)

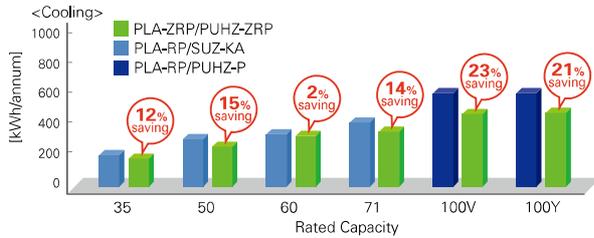

* Results are based on our own simulations. Actual power consumption may vary depending on how and where the units are used.

Energy Rank (Cooling/Heating)

Series		35V	50V	60V	71V	100V
4-way ceiling cassette	PLA-ZRP BA	A++/A++	A++/A++	A++/A+	A++/A+	A++/A++
	PLA-RP BA	A+/A+	A+/A+	A+/A	A++/A+	A++/A+
Wall-mounted	PKA-HAL/KAL	A+/A	A/A+	A++/A+	A++/A+	A++/A+
Ceiling-suspended	PCA-KAQ	A+/A+	A+/A+	A++/A+	A++/A+	A+/A
	PCA-HAQ	-	-	-	A+/A	-
Floor-standing	PSA-KA	-	-	-	A++/A+	A+/A+
Ceiling-concealed	PEAD-JAQ	A+/A+	A+/A+	A++/A+	A+/A	A+/A+

* The ErP Directive (Lot 10) applies to air conditioners of rated capacity up to 12kW.

ADVANCED ENERGY-SAVING TECHNOLOGIES

Highly efficient fan for outdoor unit


Fan opening of 550mm <100-250>

The opening for the fan in the outdoor unit is 550mm in diameter. By exchanging heat more efficiently, this will contribute to energy-saving and low noise level.



Improved fan <100-250>



A newly designed fan has been adopted, increasing airflow capacity and reducing operation noise.




Highly efficient heat exchanger

High-density heat exchanger <100-250>


ZRP 100-250 use 7.94mm-diameter pipe. The high-density heat exchanger contributes to efficient heat exchange and reduces the amount of refrigerant used, which is better for the environment.



Heat Interchanger (HIC) Added <140>

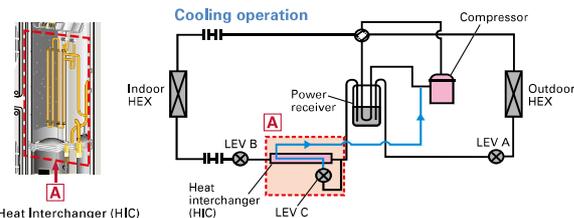

A HIC circuit has been added to improve energy efficiency during cooling operation. Liquid refrigerant is rerouted, transformed into a gas state and injected back into the system to increase overall pressure of the refrigerant being sent to the compressor, thereby reducing the load on the compressor and raising efficiency.



Side-flow Outdoor Units

All operating capacities have been unified to the side-flow configuration. Even for locations requiring large capacities, the small footprint of these outdoor units enable them to be used anywhere.



Twin Rotary Compressor (PUHZ-ZRP35/50/60/71)

Powerful yet high-efficiency rotary compressors that make use of Mitsubishi Electric technologies to achieve industry-leading energy efficiency under the new seasonal ratings. Annual power consumption has been significantly reduced compared to conventional units thanks to original Mitsubishi Electric technologies: "Poki-Poki Motors", "Heat Caulking Fixing Method", "Divisible Middle Plate" and "Flat Induction Pipe."

DC Scroll Compressor (PUHZ-ZRP100/125/140/200/250)



Our newly developed DC scroll compressor realises higher efficiency at partial load, which accounts for most of the operating time in both cooling and heating modes. The asymmetrically shaped scroll contributes to higher SEER and SCOP values and greatly reduces the annual power consumption. Compression efficiency is also improved through optimised compression and reduction of refrigerant pressure loss.

Cleaning-free Pipe Reuse Technology

Ability to use existing piping reduces pipe waste and replacement time

No Need to Clean at the Time of System Renewal*

Chloride residue builds up in existing pipes and becomes a source of trouble. In addition, the iron particles and slime produced as a result of compressor failure lead to problems. To counter this, various original Mitsubishi Electric technologies have been combined to enable the introduction of "cleaning-free pipe reuse."

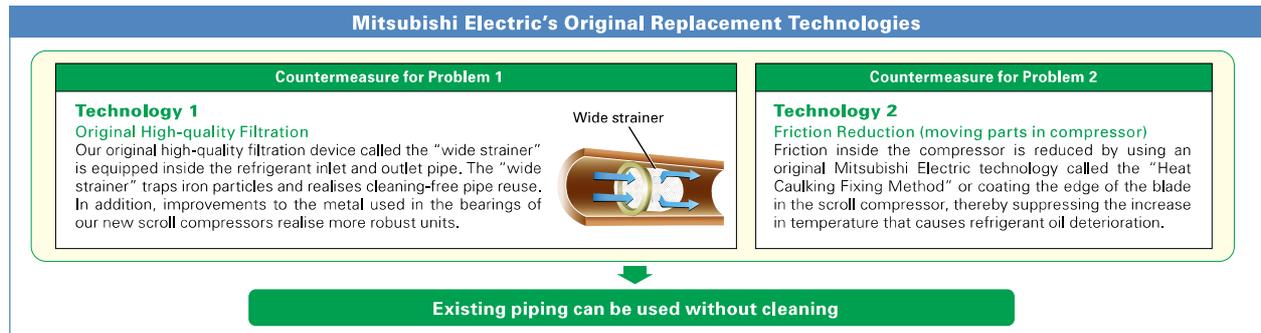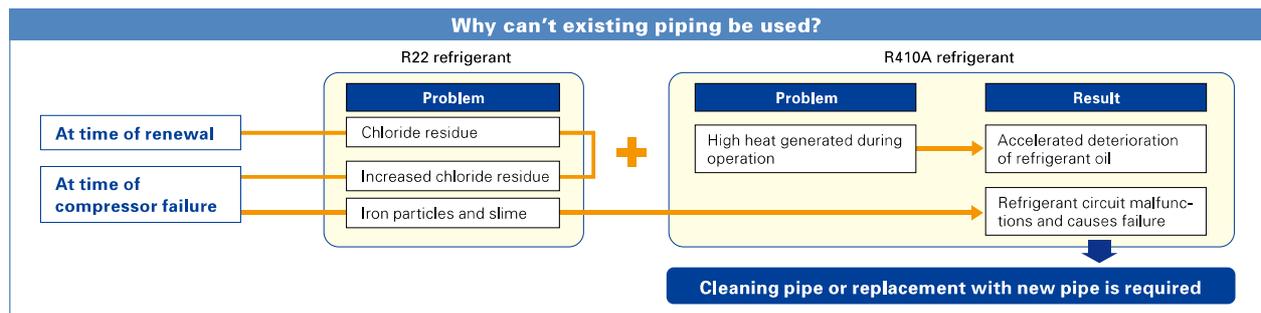

*Cautions when using existing piping

- When removing an old air conditioning unit, please make sure to perform the pump-down process and recover the refrigerant and refrigerant oil.
- Check to ensure that the piping diameter and thickness match Mitsubishi Electric specifications.
- Check to ensure that the flare is compatible with R410A.

3-phase Power-supply Inverter (100-250)

Incorporation of a 3-phase power-supply realises a dramatic reduction in operating current. This special technology is equipped in outdoor units to ensure compliance with electromagnetic compatibility regulations in Europe.

Operating current comparison (for combinations using 4-way ceiling cassettes)

Power Supply		PUHZ-ZRP100YKA2	PUHZ-ZRP125YKA2	PUHZ-ZRP140YKA2
3-phase	Max.	8,7	10,3	12,1
	Breaker size	16	16	16
Power Supply		PUHZ-ZRP100VKA2	PUHZ-ZRP125VKA2	PUHZ-ZRP140VKA2
1-phase	Max.	27,2	27,3	29,1
	Breaker size	32	32	40

Long Pipe Length

The maximum piping length is 100m*, enabling wide-ranging layout possibilities for unit installation.

Model	Max. Pipe Length	Max. Height Difference
PUHZ-ZRP35/50	50m	30m
PUHZ-ZRP60/71	50m	30m
PUHZ-ZRP100/125/140	75m	30m
PUHZ-ZRP200/250	100m	30m

When the total control/power cable length exceeds 80m, separate power sources are required for the indoor and outdoor units. (An optional power-supply terminal kit is needed for indoor units with no power-supply terminal block.)

*PUHZ-ZRP200/250 only

PLA SERIES

PLA-ZRP35/50/60/71/100/125/140BA
PLA-RP35/50/60/71/100/125/140BA



A complete line-up including deluxe units that offer added energy savings. The incorporation of wide air-outlet and the "i-see Sensor" enhances airflow distribution control, achieving an enhanced level of comfort throughout the room. The synergy of higher energy efficiency and more comfortable room environment results in the utmost user satisfaction.

Deluxe 4-way Cassette Line-up

For users seeking even further energy-savings, Mitsubishi Electric offers complete deluxe units (PLA-ZRP) for the complete line-up of models in this series from 35–140. Compared to the standard models (PLA-RP), deluxe models provide additional energy-savings, contributing to a significant reduction in electricity costs.

Line-up

Series	Model	35	50	60	71	100	125	140
Deluxe 4-way Cassette (PLA-ZRP)		●	●	●	●	●	●	●
		PLA-ZRP35BA	PLA-ZRP50BA	PLA-ZRP60BA	PLA-ZRP71BA	PLA-ZRP100BA	PLA-ZRP125BA	PLA-ZRP140BA
Standard 4-way Cassette (PLA-RP)		●	●	●	●	●	●	●
		PLA-RP35BA	PLA-RP50BA	PLA-RP60BA	PLA-RP71BA	PLA-RP100BA	PLA-RP125BA	PLA-RP140BA2

Key Technologies for Higher Energy Efficiency

New Heat Exchanger Design

Heat exchanger fin size and pitch have been changed, raising energy efficiency.

Pre-grooved Piping


High-performance pre-grooved piping is utilised, increasing the heat exchange area.

Indoor/Outdoor Unit Combinations



"Rank A++/A+" Energy Savings Achieved for Deluxe 4-way Cassette


Our new deluxe 4-way cassette indoor units combined with newly designed Power Inverter outdoor units (PUHZ-ZRP) achieve industry-leading seasonal efficiency for both cooling and heating: all rank A++ for cooling and A+ or higher for heating.

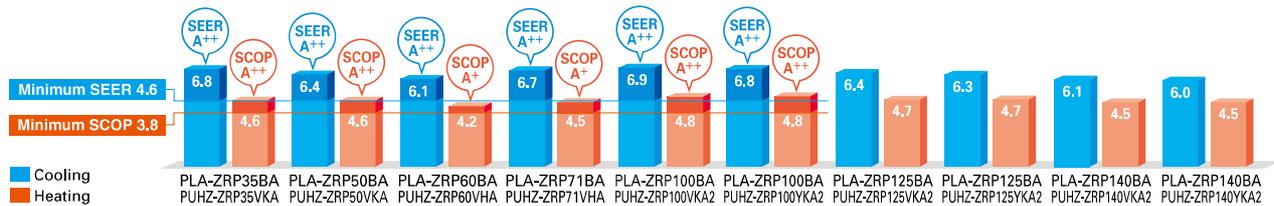

Automatic Grille Lowering Function (PLP-6BAJ)

An automatic grille lowering function is available for easy filter maintenance. Special wired and wireless remote controllers can be used to lower the grille for maintenance.

The grille can be lowered a maximum of 4m from the ceiling in 8 steps, thus enabling easy cleaning of the air filter. Cleaning of the filter is an important factor for saving energy.

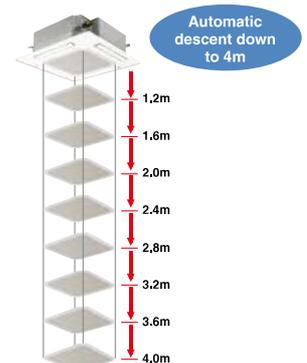


Optimum Airflow

Individual Vane Settings

Optimum airflow settings provide maximum comfort throughout the room.

In addition to the selection of variable airflow patterns (i.e., 2-, 3- or 4-way), this function allows the independent selection of vertical airflow levels for each vane, thereby maintaining a comfortable room environment with even temperature distribution.



72 airflow patterns


Wide Airflow

Wide-angle outlets distribute airflow to all corners of the room.

The outlets are larger than those of previous models and the shape has been improved for better wide-angle ventilation.



Image of multi-directional air conditioning



Individual Vane Setting + Wide Airflow

The combination of individual vane setting, which enables the optimal outlet setting for each room layout, and the wide airflow function works to ensure even temperature distribution throughout each room. The result is uniformly comfortable air conditioning.

Wave Airflow – Thoroughly warming all corners of the room!


Wave Airflow Operation

“Wave Airflow” is essentially the advanced control of the vanes directing the airflow from the unit. Blown-air is repeatedly dispersed from the unit in horizontal and downward directions at time-lagged intervals to provide uniform heating throughout the room.



* Wave Airflow is possible only when using the heating mode


Thermograph of Wave Control Effect

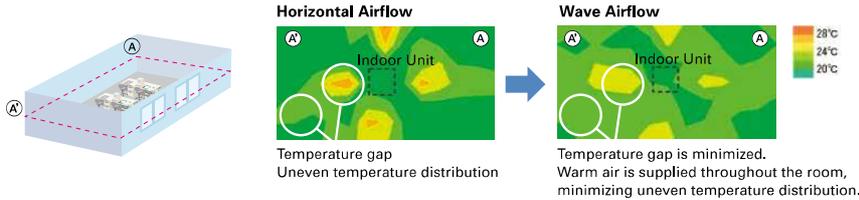

Temperature distribution comparison approximately 20min after turning on a PLA-RP71BA 4-Way ceiling cassette. The measurement point for comparison is a plane 1.2m above the floor.

Equipped with High- and Low-ceiling Modes

Units are equipped with high- and low-ceiling operation modes that make it possible to switch the airflow volume to match room height. The ability to choose the optimum airflow volume makes it possible to optimize the breezy sensation felt throughout the room.

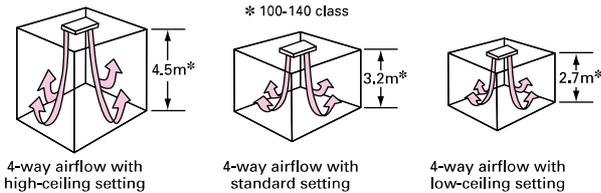

■ Airflow Range

Model	35-71 class			100-140 class		
	High-ceiling setting	Standard setting	Low-ceiling setting	High-ceiling setting	Standard setting	Low-ceiling setting
4-Way	3.5m	2.7m	2.5m	4.5m	3.2m	2.7m
3-Way	3.5m	3.0m	2.7m	4.5m	3.6m	3.0m
2-Way	3.5m	3.3m	3.0m	4.5m	4.0m	3.3m

Horizontal Airflow


A “Horizontal Airflow” function has been added to reduce drafty-feeling distribution. Horizontal Airflow prevents cold drafts from striking the body directly, thereby keeping the body from becoming over-chilled.



[Airflow Distribution]

PLA-RP125BA

Flow angle, cooling at 20°C (ceiling height 3.2m)

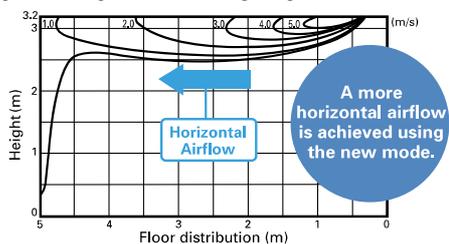


* Smudge spots on the ceiling may form where the airflow is not evenly distributed.

Automatic Air-speed Adjustment

An automatic air-speed mode that adjusts airflow speed automatically is adopted to maintain comfortable room conditions at all times. This setting automatically adjusts the air-speed to conditions that match the room environment.

At the start of heating/cooling operation, the airflow is set to high-speed to quickly heat/cool the room.

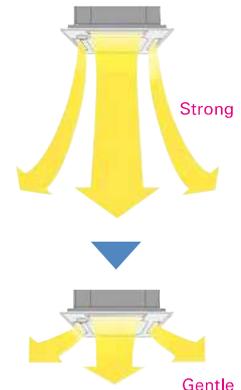

When the room temperature reaches the desired setting, the airflow speed is decreased automatically for stable comfortable heating/cooling operation.

DOES HAVING COLD FEET BOTHER YOU?

The "i-see Sensor" is the answer to your problems!



Heating Mode

Warm air rises to the ceiling!

In heating mode, the upper body gets warm but legs and feet remain chilly.

Even though the temperature on the remote controller is at a preset temperature, the temperature at floor level remains cold. As a result, there's no feeling of getting warmer.



Cooling Mode

Legs and feet feel cold!

When cooling, the legs and feet get too cold, chilling the entire body.

At the beginning of operation, the room is nice and cool; but before long the temperature at floor level drops, causing the feeling of being too cold.

"i-see Sensor" temperature-sensing technology improves energy efficiency and enhances room comfort

The "i-see Sensor" is an innovative Mitsubishi Electric technology that uses a radiation-based sensor to monitor temperature throughout an entire room. When connected to the air conditioner control panel, i-see Sensor works to maximize room comfort.

■ i-see Sensor Panel




or

■ Corner Panel Only (Option)



■ i-see Sensor Operation



The i-see Sensor rotates 90° at intervals of 5sec, accurately measuring the temperature throughout the room (covering entire floor space).

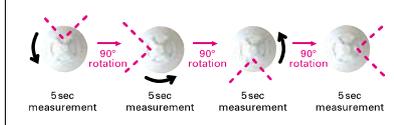

A comfortable room environment cannot be maintained by monitoring only the temperature at the ceiling.

Without "i-see Sensor"

Only intake-air temperature at the ceiling was measured, tending to overlook uneven temperature distribution at floor level.




Equipped with 4-Way Ceiling "i-see Sensor"

Both the floor temperature and intake-air temperature are measured to provide operation that creates a comfortable room environment from ceiling to floor.

In Heating Mode

When you want the temperature felt to be 20°


Temperature setting: 20°C (w/o i-see Sensor)

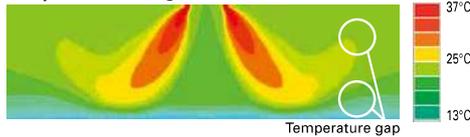

Temperature felt: 17°C (floor level 14°C)

Warm air rises to the ceiling. This causes poor heating at floor level, leaving legs and feet feeling cold.

Temperature setting: 20°C (w/ i-see Sensor + Automatic Air-speed Adjustment)

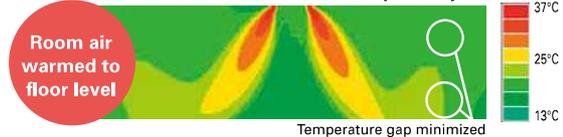

Room air warmed to floor level

Temperature felt: 20°C (floor level 20°C)


The i-see Sensor detects the temperature at the floor while the Automatic Air-speed Adjustment eliminates uneven temperature distribution by thoroughly warming the air down to the floor.

In Cooling Mode

When you want the temperature felt to be 28°C

Comfortable without excess chilliness

Temperature setting: 26-27°C (w/o i-see Sensor)

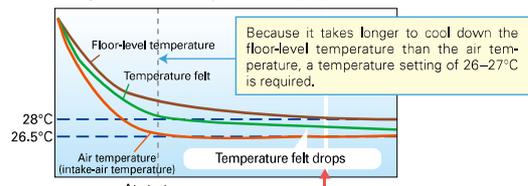


At start-up (approx. 30 min) After specified time




Temperature felt: 26.5°C

The temperature felt drops according to the drop in floor-level temperature. If the floor-level temperature is not monitored during long cooling operation, the temperature felt becomes chilly.

Temperature setting: 28°C (w/ i-see Sensor + Automatic Air-speed Adjustment)

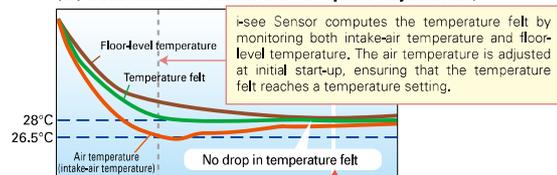

At start-up (approx. 30 min) After specified time

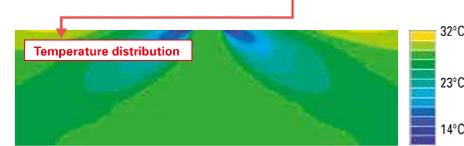

Temperature Felt: 28°C

Air temperature is adjusted according to the floor temperature to keep the temperature felt at 28°C.

SERIES SELECTION

Power Inverter Series



Indoor Unit



PLA-ZRP35/50/60/71/100/125/140BA

Standard Panel

PLP-6BA (only Panel)
PLP-6BALM (with wireless remote controller)

Automatic Filter Elevation Panel

PLP-6BAJ (only Panel)

Standard Panel with "i-see Sensor"

PLP-6BAE (only Panel)
PLP-6BALME (with wireless remote controller)

Outdoor Unit

For Single



PUHZ-ZRP35/50



PUHZ-ZRP60/71



PUHZ-ZRP100/125/140

For Multi
(Twin/Triple/Quadruple)



PUHZ-ZRP71



PUHZ-ZRP100/125/140/200/250

Remote Controller



Optional



Optional



* Enclosed in PLP-6BALM/PLP-6BALME

Standard Inverter Series



Indoor Unit



PLA-RP35/50/60/71/100/125/140BA

Standard Panel

PLP-6BA (only Panel)
PLP-6BALM (with wireless remote controller)

Automatic Filter Elevation Panel

PLP-6BAJ (only Panel)

Standard Panel with "i-see Sensor"

PLP-6BAE (only Panel)
PLP-6BALME (with wireless remote controller)

Outdoor Unit

For Single



SUZ-KA35



SUZ-KA50/60/71



PUHZ-P100



PUHZ-P125/140

For Multi (Twin/Triple/Quadruple)



PUHZ-P100



PUHZ-P125/140



PUHZ-P200/250

Remote Controller



Optional



Optional



* Enclosed in PLP-6BALM/PLP-6BALME

PLZ-ZRP/RP BA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																					
	For Single									For Twin					For Triple			For Quadruple				
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250		
Power Inverter (PUHZ-ZRP)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4		
Distribution Pipe	-	-	-	-	-	-	-	-	-	MSDD-50TR-E					MSDD-50WR-E			MSDT-111R-E			MSDF-111R-E	
Standard Inverter (PUHZ-P & SUZ)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	-	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4		
Distribution Pipe	-	-	-	-	-	-	-	-	-	MSDD-50TR-E					MSDD-50WR-E			MSDT-111R-E			MSDF-111R-E	

PLZ-RP SERIES

POWER INVERTER



Type		Inverter Heat Pump										
Indoor Unit		PLA-ZRP35BA	PLA-ZRP50BA	PLA-ZRP60BA	PLA-ZRP71BA	PLA-ZRP100BA		PLA-ZRP125BA		PLA-ZRP140BA		
Outdoor Unit		PUHZ-ZRP35VKA	PUHZ-ZRP50VKA	PUHZ-ZRP60VHA	PUHZ-ZRP71VHA	PUHZ-ZRP100VKA2	PUHZ-ZRP100VKA2	PUHZ-ZRP125VKA2	PUHZ-ZRP125VKA2	PUHZ-ZRP140VKA2	PUHZ-ZRP140VKA2	
Refrigerant		R410A*										
Power Supply		Outdoor power supply VKA · VKA2 · VHA-230 / Single / 50, VKA2:400 / Three / 50										
Cooling	Capacity	Rated kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min - Max kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0
	Total Input	Rated kW	0.79	1.43	1.78	1.77	2.18	2.16	3.87	3.87	4.37	4.37
	EER		-	-	-	-	-	-	3.23	3.23	3.07	3.07
	EEL Rank		-	-	-	-	-	-	-	-	-	-
Heating (Average Season)	Capacity	Rated kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
		Min - Max kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0
	Total Input	Rated kW	0.86	1.57	2.04	1.99	2.60	2.60	3.67	3.67	4.70	4.70
	COP		-	-	-	-	-	-	3.81	3.81	3.40	3.40
	EEL Rank		-	-	-	-	-	-	-	-	-	-

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
 *2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
 *3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

PLZ-P SERIES

STANDARD INVERTER



Type		Inverter Heat Pump										
Indoor Unit		PLA-RP35BA	PLA-RP50BA	PLA-RP60BA	PLA-RP71BA	PLA-RP100BA		PLA-RP125BA		PLA-RP140BA2		
Outdoor Unit		SUZ-KA35VA5	SUZ-KA50VA5	SUZ-KA60VA5	SUZ-KA71VA5	PUHZ-P100VHA4	PUHZ-P100VHA2	PUHZ-P125VHA3	PUHZ-P125VHA	PUHZ-P140VHA3	PUHZ-P140VHA	
Refrigerant		R410A*										
Power Supply		Outdoor power supply VA5 · VHA3 · VHA4:230 / Single / 50, VHA · VHA2:400 / Three / 50										
Cooling	Capacity	Rated kW	3.6	5.5	6.1	7.1	9.4	9.4	12.3	12.3	13.6	13.6
		Min - Max kW	1.4 - 3.9	2.3 - 5.6	2.3 - 6.3	2.8 - 8.1	4.9 - 11.2	4.9 - 11.2	5.5 - 14.0	5.5 - 14.0	5.5 - 15.0	5.5 - 15.0
	Total Input	Rated kW	1.090	1.680	1.910	2.100	3.120	3.120	4.090	4.090	5.210	5.210
	EER		-	-	-	-	-	-	3.01	3.01	2.61	2.61
	EEL Rank		-	-	-	-	-	-	B	B	D	D
Heating (Average Season)	Capacity	Rated kW	3.6	5.5	6.1	7.1	9.4	9.4	12.3	12.3	13.6	13.6
		Min - Max kW	1.7 - 5.0	1.7 - 7.2	2.5 - 8.0	2.6 - 10.2	4.5 - 12.5	4.5 - 12.5	5.0 - 16.0	5.0 - 16.0	5.0 - 18.0	5.0 - 18.0
	Total Input	Rated kW	1.040	1.750	2.060	2.247	3.280	3.280	4.110	4.110	4.980	4.980
	COP		-	-	-	-	-	-	3.41	3.41	3.21	3.21
	EEL Rank		-	-	-	-	-	-	B	B	C	C

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
 *2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
 *3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

PLZ-RP SERIES

POWER INVERTER



Type		Inverter Heat Pump											
Indoor Unit		PLA-RP35BA	PLA-RP50BA	PLA-RP60BA	PLA-RP71BA	PLA-RP100BA		PLA-RP125BA		PLA-RP140BA2			
Outdoor Unit		PUHZ-ZRP35VKA	PUHZ-ZRP50VKA	PUHZ-ZRP60VHA	PUHZ-ZRP71VHA	PUHZ-ZRP100VKA2	PUHZ-ZRP100YKA2	PUHZ-ZRP125VKA2	PUHZ-ZRP125YKA2	PUHZ-ZRP140VKA2	PUHZ-ZRP140YKA2		
Refrigerant		R410A*											
Power Supply		Outdoor power supply VKA • VKA2 • VHA-230 / Single / 50, YKA2: 400 / Three / 50											
Cooling	Capacity	Rated kW	3.5	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4	
		Min - Max kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0	
	Total Input	Rated kW	0.88	1.43	1.90	1.87	2.21	2.21	3.33	3.33	4.40	4.40	
	EER		-	-	-	-	-	-	3.13	3.13	3.05	3.05	
		EEL Rank	-	-	-	-	-	-	-	-	-	-	
		Design Load kW	3.5	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4	
Heating (Average Season)	Capacity	Rated kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0	
		Min - Max kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0	
	Total Input	Rated kW	0.96	1.82	2.17	2.21	2.95	2.95	3.91	3.91	4.76	4.76	
	COP		-	-	-	-	-	-	3.58	3.58	3.36	3.36	
		EEL Rank	-	-	-	-	-	-	-	-	-	-	
		Design Load kW	2.3	3.8	4.4	4.7	7.8	7.8	9.3	9.3	10.6	10.6	
Operating Current (max)	Input	Rated A	13.2	13.4	19.4	19.5	27.4	27.4	36.9	36.9	44.1	44.1	
		Operating Current (max) A	0.22	0.36	0.36	0.51	0.94	0.94	1.00	1.00	1.07	1.07	
	Dimensions <Panel>	H x W x D mm	258 - 840 - 840 <35 - 950 - 950>			238 - 840 - 840 <35 - 950 - 950>			238 - 840 - 840 <35 - 950 - 950>			238 - 840 - 840 <35 - 950 - 950>	
		Weight <Panel> kg	22 <6>	22 <6>	23 <6>	23 <6>	25 <6>	25 <6>	25 <6>	25 <6>	27 <6>	27 <6>	
	Air Volume [Lo-Mi2-Mi1-Hi]	Cooling m ³ /min	11-12-13-15	12-14-16-18	12-14-16-18	14-16-18-21	20-23-26-30	20-23-26-30	22-25-28-31	22-25-28-31	24-26-29-32	24-26-29-32	
		Heating m ³ /min	11-12-13-15	12-14-16-18	12-14-16-18	14-16-18-21	20-23-26-30	20-23-26-30	22-25-28-31	22-25-28-31	24-26-29-32	24-26-29-32	
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]	Cooling dB(A)	27-28-29-31	28-29-31-32	28-29-31-32	28-30-32-34	32-34-37-40	32-34-37-40	34-36-39-41	34-36-39-41	36-39-42-44	36-39-42-44	
		Heating dB(A)	27-28-29-31	28-29-31-32	28-29-31-32	28-30-32-34	32-34-37-40	32-34-37-40	34-36-39-41	34-36-39-41	36-39-42-44	36-39-42-44	
	Sound Level (PWL)	Cooling dB(A)	54	55	55	56	62	62	63	63	70	70	
		Heating dB(A)	54	55	55	56	62	62	63	63	70	70	
	Operating Current (max)	Rated A	13.0	13.0	19.0	19.0	26.5	26.5	32	32	40	40	
		Breaker Size A	16	16	25	25	32	32	32	32	40	40	
Ext. Piping	Diameter	Liquid / Gas mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88		
	Max. Length	Out-In m	50	50	50	50	75	75	75	75	75		
	Max. Height	Out-In m	30	30	30	30	30	30	30	30	30		
Guaranteed Operating Range [Outdoor]	Cooling*3 °C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46		
	Heating °C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

PLZ-P SERIES

STANDARD INVERTER



Type		Inverter Heat Pump											
Indoor Unit		PLA-ZRP100BA			PLA-ZRP125BA			PLA-ZRP140BA					
Outdoor Unit		PUHZ-P100VHA3	PUHZ-P100YHA2	PUHZ-P125VHA3	PUHZ-P125YHA	PUHZ-P140VHA3	PUHZ-P140YHA	PUHZ-P140VHA3	PUHZ-P140YHA	PUHZ-P140VHA3	PUHZ-P140YHA		
Refrigerant		R410A*											
Power Supply		Outdoor power supply 230 / Single / 50, 400 / Three / 50, 230 / Single / 50, 400 / Three / 50, 230 / Single / 50, 400 / Three / 50											
Cooling	Capacity	Rated kW	9.4	9.4	12.3	12.3	13.6	13.6	13.6	13.6	13.6		
		Min - Max kW	4.9 - 11.2	4.9 - 11.2	5.5 - 14.0	5.5 - 14.0	5.5 - 15.0	5.5 - 15.0	5.5 - 15.0	5.5 - 15.0	5.5 - 15.0		
	Total Input	Rated kW	3.082	3.082	4.020	4.020	5.171	5.171	5.171	5.171	5.171		
	EER		-	-	3.06	3.06	2.63	2.63	2.63	2.63	2.63		
		EEL Rank	-	-	B	B	D	D	D	D	D		
		Design Load kW	9.4	9.4	-	-	-	-	-	-	-		
Heating (Average Season)	Capacity	Rated kW	11.2	11.2	14.0	14.0	16.0	16.0	16.0	16.0	16.0		
		Min - Max kW	4.5 - 12.5	4.5 - 12.5	5.0 - 16.0	5.0 - 16.0	5.0 - 18.0	5.0 - 18.0	5.0 - 18.0	5.0 - 18.0	5.0 - 18.0		
	Total Input	Rated kW	3.137	3.137	3.989	3.989	4.938	4.938	4.938	4.938	4.938		
	COP		-	-	3.51	3.51	3.24	3.24	3.24	3.24	3.24		
		EEL Rank	-	-	B	B	C	C	C	C	C		
		Design Load kW	8.0	8.0	-	-	-	-	-	-	-		
Operating Current (max)	Input	Rated A	28.7	13.7	28.8	13.8	30.6	30.6	30.6	30.6	30.6		
		Operating Current (max) A	0.08	0.08	0.09	0.09	0.12	0.12	0.12	0.12	0.12		
	Dimensions <Panel>	H x W x D mm	26 <6>			238 - 840 - 840 <35 - 950 - 950>			27 <6>			27 <6>	
		Weight <Panel> kg	20-23-26-30	20-23-26-30	22-25-28-31	22-25-28-31	24-26-29-32	24-26-29-32	24-26-29-32	24-26-29-32	24-26-29-32	24-26-29-32	
	Air Volume [Lo-Mi2-Mi1-Hi]	Cooling m ³ /min	20-23-26-30	20-23-26-30	22-25-28-31	22-25-28-31	24-26-29-32	24-26-29-32	24-26-29-32	24-26-29-32	24-26-29-32		
		Heating m ³ /min	20-23-26-30	20-23-26-30	22-25-28-31	22-25-28-31	24-26-29-32	24-26-29-32	24-26-29-32	24-26-29-32	24-26-29-32		
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]	Cooling dB(A)	32-34-37-40	32-34-37-40	34-36-39-41	34-36-39-41	36-39-42-44	36-39-42-44	36-39-42-44	36-39-42-44	36-39-42-44		
		Heating dB(A)	32-34-37-40	32-34-37-40	34-36-39-41	34-36-39-41	36-39-42-44	36-39-42-44	36-39-42-44	36-39-42-44	36-39-42-44		
	Sound Level (PWL)	Cooling dB(A)	65	65	66	66	70	70	70	70	70		
		Heating dB(A)	65	65	66	66	70	70	70	70	70		
	Operating Current (max)	Rated A	28.0	13.0	28.0	13.0	29.5	29.5	29.5	29.5	29.5		
		Breaker Size A	32	16	32	16	40	40	40	40	40		
Ext. Piping	Diameter	Liquid / Gas mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88			
	Max. Length	Out-In m	50	50	50	50	50	50	50	50			
	Max. Height	Out-In m	30	30	30	30	30	30	30	30			
Guaranteed Operating Range [Outdoor]	Cooling*3 °C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46			
	Heating °C	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21			

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

PEAD SERIES

PEAD-RP35/50/60/71/100/125/140JA(L)Q



The thin, ceiling-concealed indoor units of this series are the perfect answer for the air conditioning needs of buildings with minimum ceiling installation space and wide-ranging external static pressure. Energy-saving efficiency has been improved, reducing electricity consumption and contributing to a further reduction in operating cost.

Compact Indoor Units

The height of the models from 35–140 has been unified to 250mm. Compared to the previous PEAD-RP EA model, the height has been reduced by as much as 75mm (models 100–140), making installation in low ceilings with minimal clearance space possible.



PEAD-RP JA(L)Q

Reduction of
75mm
(models 100–140)
compared to PEAD-EA

External Static Pressure


External static pressure conversion can be set up to five stages. Capable of being set to a maximum of 150Pa, units are applicable to a wide range of building types.

■ External static pressure setting

Series	35	50	60	71	100	125	140
PEAD-RP EA	30/70Pa			70/130 (with optional motor) Pa			
PEAD-RP GA	-	-	10/50/70Pa			-	-
PEAD-RP JA	35/50/70/100/150Pa						

ErP Lot 10-compliant, Achieving High Energy Efficiency of SEER/SCOP Rank A+ and A++

A direct-current (DC) fan motor is installed in the indoor unit, increasing the seasonal energy efficiency of the newly designed Power Inverter Series (PUHZ-ZRP) and resulting in compliance of the full-capacity models with ErP Lot 10 and energy rankings of A+/A++ for cooling and A/A+ for heating. This contributes to an impressive reduction in the cost of annual electricity.

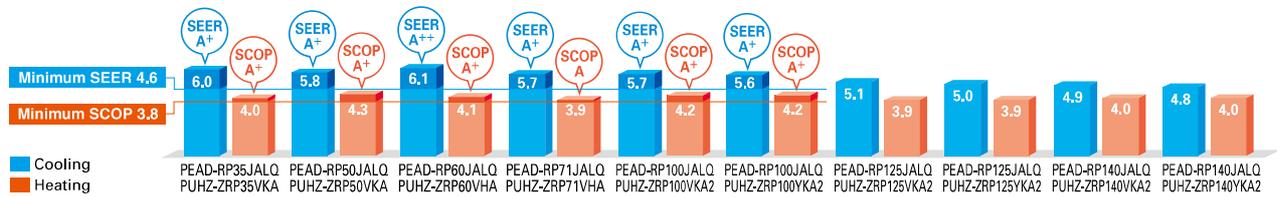

Drain Pump Option Available with All Models

The line-up consists of two types, models with or without a built-in drain pump.



PEAD-RP JAQ → Drain pump built-in



PEAD-RP JALQ → No drain pump

* Units with an "L" included at the end of the model name are not equipped with a drain pump.

SERIES SELECTION

Power Inverter Series



Indoor Unit



PEAD-RP35/50/60/71/100/125/140

Outdoor Unit

For Single



PUAH-ZRP35/50



PUAH-ZRP60/71



PUAH-ZRP100/125/140

For Multi
(Twin/Triple/Quadruple)



PUAH-ZRP71



PUAH-ZRP100/125/140/200/250

Remote Controller



Optional



Optional



Optional

Standard Inverter Series



Indoor Unit



PEAD-RP35/50/60/71/100/125/140

Outdoor Unit

For Single



SUZ-KA35



SUZ-KA50/60/71



PUAH-P100



PUAH-P125/140


For Multi (Twin/Triple/Quadruple)



PUAH-P100



PUAH-P125/140



PUAH-P200/250

Remote Controller



Optional



Optional




Optional

PEAD-RP JA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																							
	For Single								For Twin						For Triple			For Quadruple						
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250				
Power Inverter (PUAH-ZRP)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4				
Distribution Pipe	-	-	-	-	-	-	-	-	-	MSDD-50TR-E						MSDD-50WR-E			MSDT-111R-E			MSDF-111R-E		
Standard Inverter (PUAH-P & SUZ)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	-	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4				
Distribution Pipe	-	-	-	-	-	-	-	-	-	-	MSDD-50TR-E						MSDD-50WR-E			MSDT-111R-E			MSDF-111R-E	

PEDZ-RP JA SERIES

POWER INVERTER



Type	Inverter Heat Pump											
Indoor Unit	PEAD-RP35JA(L)Q	PEAD-RP50JA(L)Q	PEAD-RP60JA(L)Q	PEAD-RP71JA(L)Q	PEAD-RP100JA(L)Q	PEAD-RP125JA(L)Q	PEAD-RP140JA(L)Q	PEAD-RP150JA(L)Q	PEAD-RP160JA(L)Q	PEAD-RP180JA(L)Q	PEAD-RP200JA(L)Q	
Outdoor Unit	PUHZ-ZRP35VKA	PUHZ-ZRP50VKA	PUHZ-ZRP60VHA	PUHZ-ZRP71VHA	PUHZ-ZRP100VKA2	PUHZ-ZRP125VKA2	PUHZ-ZRP140VKA2	PUHZ-ZRP150VKA2	PUHZ-ZRP160VKA2	PUHZ-ZRP180VKA2	PUHZ-ZRP200VKA2	
Refrigerant	R410A**											
Power Supply	Outdoor power supply VKA · VHA230 / Single / 50, YKA400 / Three / 50											
Cooling	Capacity	Rated	3.6	5.0	6.1	7.1	9.5	12.5	12.5	13.4	13.4	
	Total Input	Rated	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	6.2 - 15.3	6.2 - 15.3	
		Rated	0.89(0.87)	1.44(1.42)	1.65(1.63)	2.01(1.99)	2.43(2.41)	2.43(2.41)	3.24(3.26)	3.24(3.26)	3.10(3.12)	3.10(3.12)
	EER**		2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	
	Design Load	Rated	3.6	5.0	6.1	7.1	9.5	12.5	12.5	13.4	13.4	
		Annual Electricity Consumption**	228(211)	317(301)	366(351)	446(428)	593(583)	602(592)	875(858)	886(873)	980(956)	991(976)
	SEER**		5.6(6.0)	5.5(5.8)	5.8(6.1)	5.6(5.7)	5.6(5.7)	5.5(5.6)	5.0(5.1)**	4.9(5.0)**	4.8(4.9)**	4.7(4.8)**
		Energy Efficiency Class	A+(A+)	A(A+)	A+(A+)	A+(A+)	A+(A+)	A+(A+)	A(A+)	A(A+)	A(A+)	A(A+)
	Heating (Average Season)	Capacity	Rated	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0
		Total Input	Rated	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0
Rated			0.95	1.50	1.79	2.03	2.60	2.60	3.51	3.51	4.07	
COP**			2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	
Design Load		Rated	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	
		Declared Capacity	at reference design temperature	2.4(-10°C)	3.8(-10°C)	4.4(-10°C)	4.9(-10°C)	7.8(-10°C)	7.8(-10°C)	9.3(-10°C)	9.3(-10°C)	10.6(-10°C)
Back Up Heating Capacity		at bivalent temperature	2.4(-10°C)	3.8(-10°C)	4.4(-10°C)	4.9(-10°C)	7.8(-10°C)	7.8(-10°C)	9.3(-10°C)	9.3(-10°C)	10.6(-10°C)	
		at operation limit temperature	2.2(-11°C)	3.7(-11°C)	4.3(-11°C)	4.8(-11°C)	7.7(-11°C)	7.7(-11°C)	9.2(-11°C)	9.2(-11°C)	10.5(-11°C)	
Annual Electricity Consumption**		839	1231	1513	1762	2627	2627	3370	3370	3763	3763	
SEER**			4.0	4.3	4.1	3.9	4.2	4.2	3.9**	3.9**	4.0**	4.0**
Energy Efficiency Class		A+	A+	A+	A	A	A	A	A	A		
Operating Current (max)	Input (Cooling / Heating)	Rated	0.09(0.07)/0.07	0.11(0.09)/0.09	0.12(0.10)/0.10	0.17(0.15)/0.15	0.25(0.23)/0.23	0.25(0.23)/0.23	0.36(0.34)/0.34	0.36(0.34)/0.34	0.39(0.37)/0.37	
	Operating Current (max)	A	1.07	1.39	1.62	1.97	2.65	2.65	2.76	2.76	2.78	
	Dimensions <Panel>	H x W x D	250-900-732	250-1100-732	250-1100-732	250-1400-732	250-1400-732	250-1400-732	250-1400-732	250-1400-732	250-1600-732	
	Weight <Panel>	kg	26(25)	28(27)	33(32)	33(32)	41(40)	41(40)	43(42)	43(42)	47(46)	
	Air Volume (Lo-Mid-Hi)	m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	17.5-21.0-25.0	24.0-29.0-34.0	24.0-29.0-34.0	29.5-35.5-42.0	29.5-35.5-42.0	32.0-39.0-46.0	
	External Static Pressure	Pa	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	
	Sound Level (SPL) (Lo-Mid-Hi)	dB(A)	23 - 27 - 30	26 - 31 - 35	25 - 29 - 33	26 - 30 - 34	29 - 34 - 38	29 - 34 - 38	33 - 36 - 40	33 - 36 - 40	34 - 38 - 43	
	Sound Level (PWL)	dB(A)	52	57	55	58	61	61	65	65	66	
	Operating Current (max)	A	13.0	13.0	19.0	19.0	26.5	26.5	9.5	9.5	28.0	
	Outdoor Unit	Dimensions	H x W x D	630 - 809 - 300	943 - 950 - 330(+30)	943 - 950 - 330(+30)	1338 - 1050 - 330(+40)	1338 - 1050 - 330(+40)	1338 - 1050 - 330(+40)	1338 - 1050 - 330(+40)	1338 - 1050 - 330(+40)	1338 - 1050 - 330(+40)
Weight		kg	43	46	67	67	116	116	125	118	131	
Air Volume		Cooling	45.0	45.0	55.0	55.0	110.0	110.0	120.0	120.0	120.0	
Heating		45.0	45.0	55.0	55.0	110.0	110.0	120.0	120.0	120.0		
Sound Level (SPL)		Cooling	44	44	47	47	49	49	50	50	50	
Heating		46	46	48	48	51	51	52	52	52		
Sound Level (PWL)		Cooling	65	65	67	67	69	69	70	70	70	
Operating Current (max)		A	13.0	13.0	19.0	19.0	26.5	26.5	9.5	9.5	28.0	
Breaker Size		A	16	16	25	25	32	32	16	16	40	
Ext. Piping		Diameter	Liquid / Gas	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length	Out-In	m	50	50	50	75	75	75	75	75	
	Max. Height	Out-In	m	30	30	30	30	30	30	30	30	
	Guaranteed Operating Range (Outdoor)	Cooling**	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
	Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
 *2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
 *3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.
 *5 EER/COP and SEER/SCOP for RP35-71 are measured at ESP 35Pa, for RP100 at ESP 37Pa, for RP125/140 at ESP 50Pa. *6 Only the JAQ model is targeted for EUROVENT registration.

PEDZ-P JA SERIES

STANDARD INVERTER



Type	Inverter Heat Pump											
Indoor Unit	PEAD-RP35JA(L)Q	PEAD-RP50JA(L)Q	PEAD-RP60JA(L)Q	PEAD-RP71JA(L)Q	PEAD-RP100JA(L)Q	PEAD-RP125JA(L)Q	PEAD-RP140JA(L)Q	PEAD-RP150JA(L)Q	PEAD-RP160JA(L)Q	PEAD-RP180JA(L)Q	PEAD-RP200JA(L)Q	
Outdoor Unit	SUZ-KA35VA5	SUZ-KA50VA5	SUZ-KA60VA5	SUZ-KA71VA5	PUHZ-P100VHA4	PUHZ-P100VHA2	PUHZ-P125VHA3	PUHZ-P125VHA	PUHZ-P140VHA3	PUHZ-P140VHA		
Refrigerant	R410A**											
Power Supply	Outdoor power supply VA5 · VHA3 · VHA4:230 / Single / 50, YHA · YHA2:400 / Three / 50											
Cooling	Capacity	Rated	3.6	4.9	5.7	7.1	9.4	9.4	12.3	12.3	13.6	
	Total Input	Rated	1.4 - 3.9	2.3 - 5.6	2.3 - 6.3	2.8 - 8.1	4.9 - 11.2	4.9 - 11.2	5.5 - 14.0	5.5 - 14.0	5.5 - 15.0	
		Rated	1.050(1.030)	1.480(1.460)	1.670(1.650)	2.080(2.060)	3.120(3.102)	3.120(3.102)	4.220(4.200)	4.220(4.200)	4.520(4.500)	
	EER**		2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	
	Design Load	Rated	3.6	4.9	5.7	7.1	9.4	9.4	12.3	12.3	13.6	
		Annual Electricity Consumption**	229(213)	318(301)	351(335)	429(413)	716(694)	716(694)	1000(978)	1000(978)	1100(1078)	
	SEER**		5.5(5.9)	5.4(5.7)	5.6(5.9)	5.8(6.0)	4.6(4.7)	4.6(4.7)	4.6(4.7)	4.6(4.7)	4.6(4.7)	
		Energy Efficiency Class	A(A+)	A(A+)	A+(A+)	A+(A+)	A	A	A	A	A	
	Heating (Average Season)	Capacity	Rated	4.1	5.9	7.0	8.0	11.2	11.2	14.0	14.0	16.0
		Total Input	Rated	1.7 - 5.0	1.7 - 7.2	2.5 - 8.0	2.6 - 10.2	4.5 - 12.5	4.5 - 12.5	5.0 - 16.0	5.0 - 16.0	5.0 - 18.0
Rated			1.110	1.620	1.930	2.040	3.103	3.103	3.870	3.870	4.430	
COP**			2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	
Design Load		Rated	4.1	5.9	7.0	8.0	11.2	11.2	14.0	14.0	16.0	
		Declared Capacity	at reference design temperature	2.5(-10°C)	3.9(-10°C)	4.1(-10°C)	5.3(-10°C)	6.3(-10°C)	6.3(-10°C)	7.1(-10°C)	7.1(-10°C)	
Back Up Heating Capacity		at bivalent temperature	2.5(-10°C)	3.9(-10°C)	4.1(-10°C)	5.3(-10°C)	6.3(-10°C)	6.3(-10°C)	7.1(-10°C)	7.1(-10°C)		
		at operation limit temperature	2.5(-10°C)	3.9(-10°C)	4.1(-10°C)	5.3(-10°C)	6.3(-10°C)	6.3(-10°C)	7.1(-10°C)	7.1(-10°C)		
Annual Electricity Consumption**		980	1466	1569	2153	2945	2945	3945	3945	4430		
SEER**			4.0	4.2	4.0	3.9	3.8	3.8	3.8	3.8	3.8	
Energy Efficiency Class		A+	A+	A+	A	A	A	A	A			
Operating Current (max)	Input (Cooling / Heating)	Rated	0.09(0.07)/0.07	0.11(0.09)/0.09	0.12(0.10)/0.10	0.17(0.15)/0.15	0.25(0.23)/0.23	0.25(0.23)/0.23	0.36(0.34)/0.34	0.36(0.34)/0.34	0.39(0.37)/0.37	
	Operating Current (max)	A	1.07	1.39	1.62	1.97	2.65	2.65	2.76	2.76	2.78	
	Dimensions <Panel>	H x W x D	250-900-732	250-1100-732	250-1100-732	250-1400-732	250-1400-732	250-1400-732	250-1400-732	250-1400-732	250-1600-732	
	Weight <Panel>	kg	26(25)	28(27)	33(32)	33(32)	41(40)	41(40)	43(42)	43(42)	47(46)	
	Air Volume (Lo-Mid-Hi)	m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	17.5-21.0-25.0	24.0-29.0-34.0	24.0-29.0-34.0	29.5-35.5-42.0	29.5-35.5-42.0	32.0-39.0-46.0	
	External Static Pressure	Pa	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	
	Sound Level (SPL) (Lo-Mid-Hi)	dB(A)	23 - 27 - 30	26 - 31 - 35	25 - 29 - 33	26 - 30 - 34	29 - 34 - 38	29 - 34 - 38	33 - 36 - 40	33 - 36 - 40	34 - 38 - 43	
	Sound Level (PWL)	dB(A)	52	57	55	58	61	61	65	65	66	
	Operating Current (max)	A	13.0	13.0	19.0	19.0	26.5	26.5	9.5	9.5	28.0	
	Outdoor Unit	Dimensions	H x W x D	550-800-285	880-840-330	880-840-330	943-950-330(+30)	943-950-330(+30)	1350-950-330(+30)	1350-950-330(+30)	1350-950-330(+30)	1350-950-330(+30)
Weight		kg	35	54	53	75	77	99	101	99	101	
Air Volume		Cooling	36.3	44.6	40.9	50.1	60.0	60.0	100.0	100.0	100.0	
Heating		34.8	44.6	49.2	48.2	60.0	60.0	100.0	100.0	100.0		
Sound Level (SPL)		Cooling	49	52	55	55	50	50	51	51	52	
Heating		50	52	55	55	54	54	55	55	56		
Sound Level (PWL)		Cooling	62	65	65	69	70	71	71	73	73	
Operating Current (max)		A	8.2	12.0	14.0	16.1	28.0	13.0	28.0	13.0	29.5	
Breaker Size		A	16	20	20	20	32	32	16	16	40	
Ext. Piping		Diameter	Liquid / Gas	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length	Out-In	m	20	30	30	30	50	50	50		
	Max. Height	Out-In	m	12								

PEA SERIES




PEA-RP200/250/400/500GAQ



For elegance and style, the PEA Series complements the room environment with an aesthetically pleasing ceiling installation and a vast line-up of performance functions. Long pipe work installation is supported, increasing freedom in the placement of indoor units.

Flexible Duct Design Enables Use of High-pressure Static Fan

A flexible duct design and 150Pa external static high-pressure are incorporated. The increased variation in airflow options ensures operation that best matches virtually all room layouts.

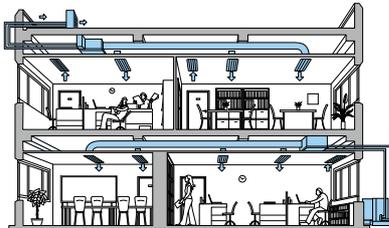

Long Refrigerant Piping Length

With the addition of more refrigerant, the maximum length for refrigerant piping has been increased to 100 metres. As a result, it is much easier to create the optimum layout for unit installation.

		Power Inverter Connection		Standard Inverter Connection	
		Max. Length	Max. Height	Max. Length	Max. Height
PEA-RP	200	100m	30m	70m	30m
	250	100m	30m	70m	30m
	400	100m	30m	70m	30m
	500	100m	30m	70m	30m


Wide-ranging Line-up from 20–50kW – Extensive Array of Choices to Match Building Size

[System Image]


PEA-RP200/250GAQ




• For PEA-200, 250

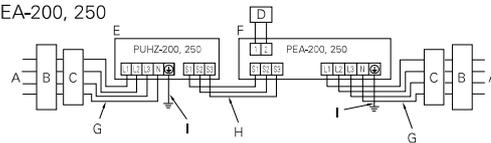

PEA-RP400/500GAQ

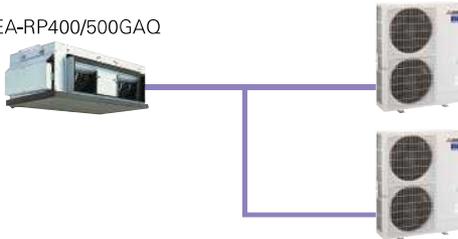

• For PEA-400, 500

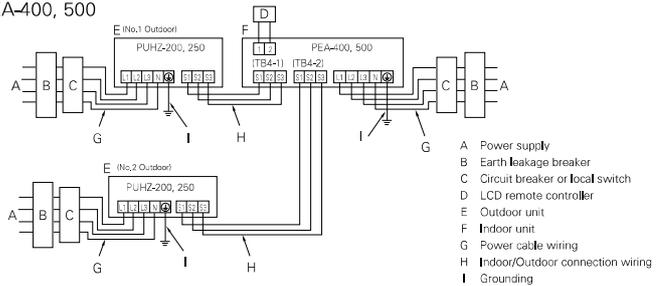


PAR-32MAA Group Control

The PAR-32MAA remote controller can control up to 16 systems* as a group, and is ideal for supporting the integrated management of building air conditioners.

*Count each set of PEA-RP400 and PEA-RP500 as two systems as two outdoor units are connected.

• For PEA-200, 250

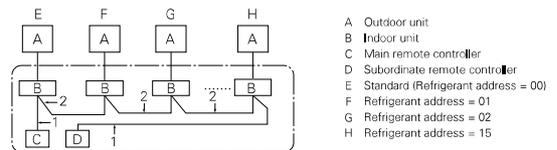

LINE-UP		
Indoor Unit <p>PEA-RP200/250/400/500GAQ</p>	Outdoor Unit * Two units are used when connecting PEA-RP400/500GAQ. Power Inverter Series <p>PUHZ-ZRP200/250</p>	Standard Inverter Series <p>PUHZ-P200/250</p>
		Remote Controller <p>Optional</p>

PEZ-RP SERIES

POWER INVERTER



Type		Inverter Heat Pump						
Indoor Unit		PEA-RP200GAQ	PEA-RP250GAQ	PEA-RP400GAQ	PEA-RP500GAQ			
Outdoor Unit		PUHZ-ZRP200YKA	PUHZ-ZRP250YKA	PUHZ-ZRP200YKA x 2	PUHZ-ZRP250YKA x 2			
Refrigerant		R410A*1						
Power Supply		Outdoor power supply						
Outdoor (V/Phase/Hz)		400 / Three / 50						
Cooling	Capacity	Rated	kW	19,0	22,0	38,0	44,0	
		Min - Max	kW	9,0 - 22,4	11,2 - 27,0	18,0 - 44,8	22,4 - 54,0	
	Total Input	Rated	kW	6,46	8,31	12,47	17,10	
	EER			2,94	2,65	3,05	2,57	
	EEL Rank		-	-	-	-		
Heating (Average Season)	Capacity	Rated	kW	22,4	27,0	44,8	54,0	
		Min - Max	kW	9,5 - 25,0	12,5 - 31,0	18,0 - 50,0	25,0 - 62,0	
	Total Input	Rated	kW	6,94	8,94	13,43	18,36	
	COP			3,23	3,02	3,34	2,94	
	EEL Rank		-	-	-	-		
Operating Current (max)				21,0	23,3	41,8	47,4	
Indoor Unit	Input [Cooling / Heating]	Rated	kW	1,000	1,180	1,550	2,840	
	Operating Current (max)		A	2,0	2,3	3,8	5,4	
	Dimensions	H x W x D	mm	400 - 1400 - 634	400 - 1600 - 634	595 - 1947 - 764		
	Weight		kg	70	77	130	133	
	Air Volume [Lo-Mid-Hi]		m ³ /min	52,0 - 65,0	64,0 - 80,0	120,0	160,0	
	External Static Pressure		Pa	150	150	150	150	
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	48 - 51	49 - 52	52*2	53*2	
	Sound Level (PWL)		dB(A)	15	15	15	15	
	Outdoor Unit	Dimensions	H x W x D	mm	1338 - 1050 - 330(+40)		1338 - 1050 - 330(+40)	
		Weight		kg	135	135	135	135
Air Volume		Cooling	m ³ /min	140	140	140	140	
		Heating	m ³ /min	140	140	140	140	
Sound Level (SPL)		Cooling	dB(A)	59	59	59	59	
		Heating	dB(A)	62	62	62	62	
Sound Level (PWL)		Cooling	dB(A)	77	77	77	77	
		Operating Current (max)		A	19,0	21,0	19,0	21,0
Breaker Size			A	32	32	32	32	
Ext. Piping		Diameter	Liquid / Gas	mm	9,52 / 25,4	12,7 / 25,4	9,52 / 25,4	12,7 / 25,4
	Max. Length	Out-In	m	100	100	100	100	
	Max. Height	Out-In	m	30	30	30	30	
Guaranteed Operating Range [Outdoor]	Cooling*3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46		
	Heating	°C	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
 *2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
 *3 Optional air protection guide is required where ambient temperature is lower than -5°C.
 *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

PEZ-P SERIES

STANDARD INVERTER



Type		Inverter Heat Pump						
Indoor Unit		PEA-RP200GAQ	PEA-RP250GAQ	PEA-RP400GAQ	PEA-RP500GAQ			
Outdoor Unit		PUHZ-P200YKA	PUHZ-P250YKA	PUHZ-P200YKA x 2	PUHZ-P250YKA x 2			
Refrigerant		R410A*1						
Power Supply		Outdoor power supply						
Outdoor (V/Phase/Hz)		400 / Three / 50						
Cooling	Capacity	Rated	kW	19,0	22,0	38,0	44,0	
		Min - Max	kW	9,0 - 22,4	11,2 - 27,0	18,0 - 44,8	22,4 - 54,0	
	Total Input	Rated	kW	6,64	8,71	12,83	17,90	
	EER			2,86	2,53	2,96	2,46	
	EEL Rank		-	-	-	-		
Heating (Average Season)	Capacity	Rated	kW	22,4	27,0	44,8	54,0	
		Min - Max	kW	9,5 - 25,0	12,5 - 31,0	18,0 - 50,0	25,0 - 62,0	
	Total Input	Rated	kW	7,10	9,31	13,75	19,10	
	COP			3,15	2,90	3,26	2,83	
	EEL Rank		-	-	-	-		
Operating Current (max)				21,0	23,3	41,8	47,4	
Indoor Unit	Input [Cooling / Heating]	Rated	kW	1,000	1,180	1,550	2,840	
	Operating Current (max)		A	2,0	2,3	3,8	5,4	
	Dimensions	H x W x D	mm	400 - 1400 - 634	400 - 1600 - 634	595 - 1947 - 764		
	Weight		kg	70	77	130	133	
	Air Volume [Lo-Mid-Hi]		m ³ /min	52,0 - 65,0	64,0 - 80,0	120,0	160,0	
	External Static Pressure		Pa	150	150	150	150	
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	48 - 51	49 - 52	52*2	53*2	
	Sound Level (PWL)		dB(A)	15	15	15	15	
	Outdoor Unit	Dimensions	H x W x D	mm	1338 - 1050 - 330(+40)		1338 - 1050 - 330(+40)	
		Weight		kg	127	135	127	135
Air Volume		Cooling	m ³ /min	140	140	140	140	
		Heating	m ³ /min	140	140	140	140	
Sound Level (SPL)		Cooling	dB(A)	58	59	58	59	
		Heating	dB(A)	60	62	60	62	
Sound Level (PWL)		Cooling	dB(A)	78	77	78	77	
		Operating Current (max)		A	19,0	21,0	19,0	21,0
Breaker Size			A	32	32	32	32	
Ext. Piping		Diameter	Liquid / Gas	mm	9,52 / 25,4	12,7 / 25,4	9,52 / 25,4	12,7 / 25,4
	Max. Length	Out-In	m	70	70	70	70	
	Max. Height	Out-In	m	30	30	30	30	
Guaranteed Operating Range [Outdoor]	Cooling*3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46		
	Heating	°C	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
 *2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
 *3 Optional air protection guide is required where ambient temperature is lower than -5°C.
 *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

PKA SERIES

The compact, wall-mounted indoor units offer the convenience of simple installation, and a large product line-up (RP35-RP100 models) ensures a best-match solution. Designed for highly efficient energy savings, the PKA Series is the answer to your air conditioning needs.

PKA-RP35/50HAL



PKA-RP60/71/100KAL




Flat Panel & Pure White Finish

A flat panel layout has been adopted for all models. Pursuing a design that harmonizes with virtually any interior, the unit colour has been changed from white to pure white.




Compact Indoor Units

Indoor unit width has been reduced by as much as 510mm (RP100). Units take up much less space, greatly increasing installation possibilities.

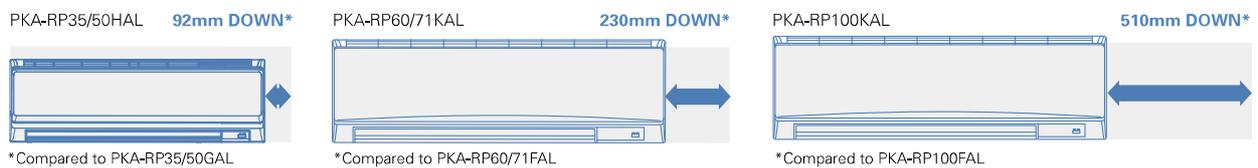


ErP Lot 10 Compliant with High Energy-efficiency Achieving SEER/SCOP Rank A, A+ and A++

Highly efficient indoor unit heat exchangers and newly designed power inverters (PUHZ-ZRP) contribute to an amazing reduction in electricity consumption throughout a year, and have resulted in models in the full-capacity range attaining the rank A, A+ and A++ energy savings rating.

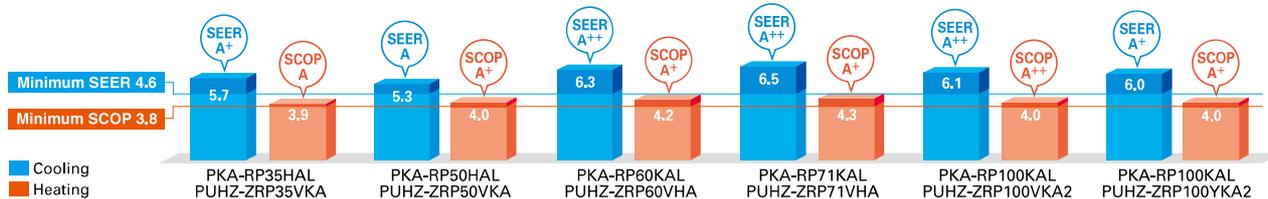

Drain Pump Option Available with All Models

Installation of the drain pump enables a drain outlet as high as 800mm above the base of the indoor unit. Drain water can be discharged easily even if the surface where the wall-mounted unit does not have direct access outside, increasing the degree of freedom for installation.

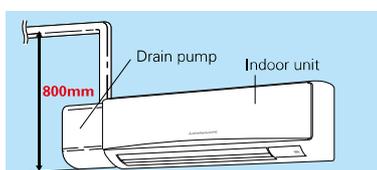

Multi-function Wired Remote Controller

In addition to using the wireless remote controller that comes as standard equipment, PAR-32MAA and PAC-YT52CRA wired remote controllers can be used as well.

* Connection to PAR-32MAA/PAC-YT52CRA requires PAC-SH29TC-E (optional).

Main Functions

- Night Setback
- Energy-saving Mode
- Multi Language
- Weekly Timer
- Refrigerant Leak Check

* For details, please refer to pages 25-28.



SERIES SELECTION

Power Inverter Series



Indoor Unit



PKA-RP35/50HAL



PKA-RP60/71/100KAL

Outdoor Unit

For Single



PUAZ-ZRP35/50



PUAZ-ZRP60/71



PUAZ-ZRP100

For Multi
(Twin/Triple/Quadruple)



PUAZ-ZRP71



PUAZ-ZRP100/125/140/200/250

Remote Controller



Optional (*)



Optional (*)



Standard Inverter Series



Indoor Unit



PKA-RP35/50HAL



PKA-RP60/71/100KAL

Outdoor Unit

For Single



PUAZ-P100

For Multi
(Twin/Triple/Quadruple)



PUAZ-P100



PUAZ-P125/140



PUAZ-P200/250

Remote Controller



Optional (*)



Optional (*)



(*) PAC-SH29TC-E is required (optional)

PKZ-RP HA/KA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																			
	For Single									For Twin						For Triple			For Quadruple	
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUAZ-ZRP)	35x1	50x1	60x1	71x1	100x1	-	-	-	-	35x2	50x2	60x2	71x2	100x2	-	50x3	60x3	71x3	50x4	60x4
Distribution Pipe	-	-	-	-	-	-	-	-	-	MSDD-50TR-E			MSDD-50TR-E			MSDT-111R-E			MSDF-111R-E	
Standard Inverter (PUAZ-P)	-	-	-	-	100x1	-	-	-	-	-	50x2	60x2	71x2	100x2	-	50x3	60x3	71x3	50x4	60x4
Distribution Pipe	-	-	-	-	-	-	-	-	-	MSDD-50TR-E			MSDD-50TR-E			MSDT-111R-E			MSDF-111R-E	

PKZ-RP SERIES

POWER INVERTER



Type			Inverter Heat Pump						
Indoor Unit			PKA-RP35HAL	PKA-RP50HAL	PKA-RP60KAL	PKA-RP71KAL	PKA-RP100KAL		
Outdoor Unit			PUHZ-ZRP35VKA	PUHZ-ZRP50VKA	PUHZ-ZRP60VHA	PUHZ-ZRP71VHA	PUHZ-ZRP100VKA2	PUHZ-ZRP100YKA2	
Refrigerant			R410A*						
Power Supply			Outdoor power supply						
Source			VKA · VHA-230 / Single / 50, YKA-400 / Three / 50						
Outdoor (V/Phase/Hz)									
Cooling	Capacity	Rated	kW	3,6	4,6	6,1	7,1	9,5	9,5
		Min - Max	kW	1,6 - 4,5	2,3 - 5,6	2,7 - 6,7	3,3 - 8,1	4,9 - 11,4	4,9 - 11,4
	Total Input	Rated	kW	0,94	1,41	1,60	1,80	2,40	2,40
	EER								
	Design Load		kW	3,6	4,6	6,1	7,1	9,5	9,5
			kWh/a	221	304	336	381	539	550
	Annual Electricity Consumption**		kWh/a	5,7	6,3	6,3	6,5	6,1	6,0
SEER									
Energy Efficiency Class			A+	A	A++	A++	A++	A+	
Heating (Average Season)	Capacity	Rated	kW	4,1	5,0	7,0	8,0	11,2	11,2
		Min - Max	kW	1,6 - 5,2	2,5 - 7,3	2,8 - 8,2	3,5 - 10,2	4,5 - 14,0	4,5 - 14,0
	Total Input	Rated	kW	1,07	1,50	1,96	2,19	3,04	3,04
	COP								
	Design Load		kW	2,4	3,3	4,4	4,7	7,8	7,8
			kWh/a	160	216	288	312	528	528
	Declared Capacity	at reference design temperature	kW	2,4 (-10°C)	3,3 (-10°C)	4,4 (-10°C)	4,7 (-10°C)	7,8 (-10°C)	7,8 (-10°C)
		at bivalent temperature	kW	2,4 (-10°C)	3,3 (-10°C)	4,4 (-10°C)	4,7 (-10°C)	7,8 (-10°C)	7,8 (-10°C)
Back Up Heating Capacity	at operation limit temperature	kW	2,2 (-11°C)	3,2 (-11°C)	2,8 (-20°C)	3,5 (-20°C)	5,8 (-20°C)	5,8 (-20°C)	
		kW	0	0	0	0	0	0	
Annual Electricity Consumption**		kWh/a	847	1160	1473	1532	2608	2608	
SCOP			3,9	4,0	4,2	4,3	4,1	4,1	
Energy Efficiency Class			A	A+	A+	A+	A+	A+	
Operating Current (max)		A	13,4	13,4	19,4	19,4	27,1	8,6	
Indoor Unit	Input	Rated	kW	0,04	0,04	0,06	0,06	0,08	0,08
	Operating Current (max)		A	0,4	0,4	0,43	0,43	0,57	0,57
	Dimensions <Panel>	H x W x D	mm	295 - 898 - 249		365 - 1170 - 295		365 - 1170 - 295	
			kg	13	13	21	21	21	21
	Air Volume (Lo-Mid-Hi)		m³/min	9 - 10,5 - 12	9 - 10,5 - 12	18 - 20 - 22	18 - 20 - 22	20 - 23 - 26	20 - 23 - 26
			dB(A)	36 - 40 - 43	36 - 40 - 43	39 - 42 - 45	39 - 42 - 45	41 - 45 - 49	41 - 45 - 49
	Sound Level (SPL)		dB(A)	60	60	64	64	65	65
Sound Level (PWL)		dB(A)	60	60	64	64	65	65	
Outdoor Unit	Dimensions	H x W x D	mm	630 - 809 - 300		943 - 950 - 330 (+30)		1338 - 1050 - 330 (+40)	
			kg	43	46	67	67	116	123
	Air Volume	Cooling	m³/min	45,0	45,0	55,0	55,0	110,0	110,0
		Heating	m³/min	45,0	45,0	55,0	55,0	110,0	110,0
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49
		Heating	dB(A)	46	46	48	48	51	51
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69
		Heating	dB(A)	65	65	67	67	69	69
	Operating Current (max)		A	13,0	13,0	19,0	19,0	26,5	8,0
Breaker Size		A	16	16	25	25	32	16	
Ext. Piping	Diameter	Liquid / Gas	mm	6,35 / 12,7	6,35 / 12,7	9,52 / 15,88	9,52 / 15,88	9,52 / 15,88	9,52 / 15,88
	Max. Length	Out-In	m	50	50	50	50	75	75
	Max. Height	Out-In	m	30	30	30	30	30	30
Guaranteed Operating Range [Outdoor]	Cooling**3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
	Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
 **2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
 *3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

PKZ-P SERIES

STANDARD INVERTER



Type			Inverter Heat Pump					
Indoor Unit			PKA-RP100KAL					
Outdoor Unit			PUHZ-P100VHA4	PUHZ-P100YHA2				
Refrigerant			R410A*					
Power Supply			Outdoor power supply					
Source			230 / Single / 50					
Outdoor (V/Phase/Hz)			400 / Three / 50					
Cooling	Capacity	Rated	kW	9,4		9,4		
		Min - Max	kW	4,9 - 11,2		4,9 - 11,2		
	Total Input	Rated	kW	3,120		3,120		
	Design Load		kW	3,4		3,4		
			kWh/a	686		686		
	SEER			4,3		4,3		
	Energy Efficiency Class			B		B		
Heating (Average Season)	Capacity	Rated	kW	11,2		11,2		
		Min - Max	kW	4,5 - 12,5		4,5 - 12,5		
	Total Input	Rated	kW	3,490		3,490		
	Design Load		kW	7,0		7,0		
			kWh/a	2579		2579		
	Declared Capacity	at reference design temperature	kW	5,6 (-10°C)		5,6 (-10°C)		
		at bivalent temperature	kW	6,2 (-7°C)		6,2 (-7°C)		
	Back Up Heating Capacity	at operation limit temperature	kW	4,5 (-15°C)		4,5 (-15°C)		
			kW	1,4		1,4		
Annual Electricity Consumption**		kWh/a	2579		2579			
SCOP			3,8		3,8			
Energy Efficiency Class			A		A			
Operating Current (max)		A	28,6		13,6			
Indoor Unit	Input	Rated	kW	0,08		0,08		
	Operating Current (max)		A	0,57		0,57		
	Dimensions <Panel>	H x W x D	mm	365 - 1170 - 295		365 - 1170 - 295		
			kg	21		21		
	Air Volume (Lo-Mid-Hi)		m³/min	20 - 23 - 26		20 - 23 - 26		
			dB(A)	41 - 45 - 49		41 - 45 - 49		
	Sound Level (SPL)		dB(A)	65		65		
Sound Level (PWL)		dB(A)	65		65			
Outdoor Unit	Dimensions	H x W x D	mm	943 - 950 - 330 (+30)		943 - 950 - 330 (+30)		
			kg	75		77		
	Air Volume	Cooling	m³/min	60,0		60,0		
		Heating	m³/min	60,0		60,0		
	Sound Level (SPL)	Cooling	dB(A)	50		50		
		Heating	dB(A)	54		54		
	Sound Level (PWL)	Cooling	dB(A)	70		70		
		Heating	dB(A)	70		70		
	Operating Current (max)		A	28,0		13,0		
Breaker Size		A	32		16			
Ext. Piping	Diameter	Liquid / Gas	mm	9,52 / 15,88		9,52 / 15,88		
	Max. Length	Out-In	m	50		50		
	Max. Height	Out-In	m	30		30		
Guaranteed Operating Range [Outdoor]	Cooling**3	°C	-15 ~ +46		-15 ~ +46			
	Heating	°C	-15 ~ +21		-15 ~ +21			

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
 **2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
 *3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

PCA-KA SERIES

PCA-RP35/50/60/71/100/125/140KAQ



A stylish new indoor unit design and airflow settings for both high- and low-ceiling interiors expand installation possibilities. Together with exceptional energy-saving performance, these units are the solution to diversified air conditioning needs.


Stylish Indoor Unit Design

A stylish square-like design is adopted for the indoor units of all models. As a result, the units blend in better with the ceiling.




ErP Lot 10 Compliant with High Energy-efficiency Achieving SEER/SCOP Rank A, A+ and A++

A direct-current (DC) fan motor is installed in the indoor unit, increasing the seasonal energy efficiency of newly designed Power Inverter series (PUHZ-ZRP) and resulting in the full capacity models comply ErP Lot 10 with energy ranking A+/A++ for cooling and A/A+ for heating. This contribute to an impressive reduction in the cost of annual electricity.

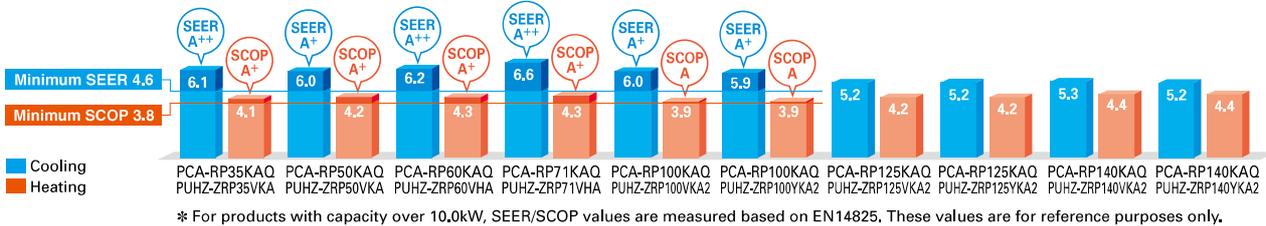


Optional Drain Pump for Full-capacity Models

The pumping height of the optional drain pump has been increased from 400mm to 600mm, expanding flexibility in choosing unit location during installation work.




Outside-air Intake

Units are equipped with a knock-out hole that enables the induction of fresh outside-air.

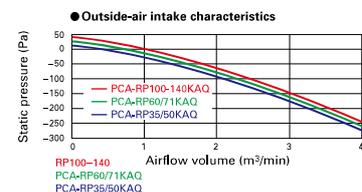

Equipped with Automatic Air-speed Adjustment

In addition to the conventional 4-speed setting, units are now equipped with an automatic air-speed adjustment mode. This setting automatically adjusts the air-speed to conditions that match the room environment. At the start of heating/cooling operation, the airflow is set to high-speed to quickly heat/cool the room. When the room temperature reaches the desired setting, the airflow speed is decreased automatically for stable comfortable heating/cooling operation.

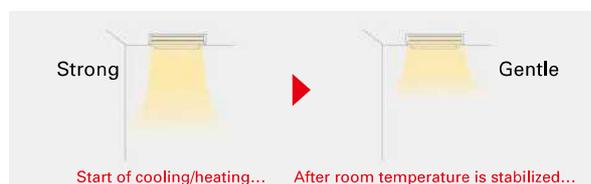

Equipped with High-/Low-ceiling Modes

Units are equipped with high- and low-ceiling operation modes that make it possible to switch the airflow volume to match room height. The ability to choose the optimum airflow volume makes it possible to optimize the breezy sensation felt throughout the room.

Capacity	High ceiling	Standard ceiling	Low ceiling
35	3.5m	2.7m	2.5m
50	3.5m	2.7m	2.5m
60	3.5m	2.7m	2.5m
71	3.5m	2.7m	2.5m
100	4.2m	3.0m	2.6m
125	4.2m	3.0m	2.6m
140	4.2m	3.0m	2.6m

PCA-HA SERIES

PCA-RP71HAQ



Standard features include a strong carbon-black stainless steel body and built-in oil mist filter to prevent oil from getting into the unit providing a comfortable air conditioning environment in kitchens that use open-flame cooking.

Tough on Oily Smoke

A durable stainless steel casing that is resistant to oil and grease is provided to protect the surface of the body. Grimy dirt and stains are removed easily, enabling the unit to be kept clean at all times.

High-performance Oil Mist Filter

A high-performance heavy-duty oil mist filter is included as standard equipment. The filtering system is more efficient than conventional filters, thereby effectively reducing the oily smoke entering the air conditioner. The filter is disposable, thereby enabling trouble-free cleaning and maintenance.

Oil Mist Filter Cleaning

When used in kitchens, the oil mist filter should be replaced once every two months. The system comes with 12 filter elements. After these have been used, optional elements (PAC-SG38KF-E) can be purchased.



Oil mist filter



Pull the handle to easily slide the filter out


Easy Maintenance – Even for Cleaning the Fan

A separate fan casing that can be disassembled in sections is adopted to ensure easy fan cleaning. Drain pan cleaning onsite is also no problem owing to the use of a pipe connector that is easily removed.




Cosmetic Front and Hanging Fixture Covers (Option)

Cosmetic covers are available to prevent the collection of dust and grime on the main body and hanging fixture sections.

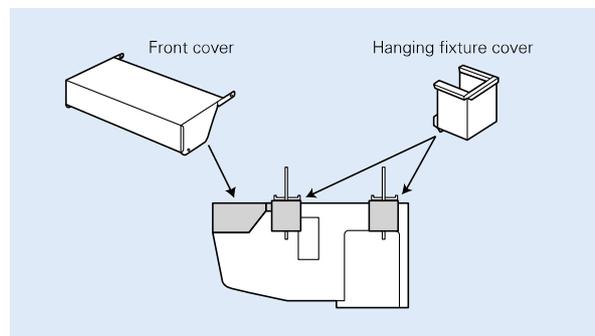

Fresh Outside-air Intake (Option)

There is a knock-out opening on the rear panel of the unit that can be used to bring fresh air into the unit. This helps to improve ventilation and make the kitchen comfortable.

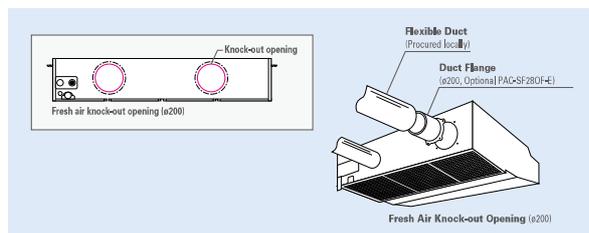

Notes: 1) A fresh-air duct flange is required (sold separately)
2) Intake air is not 100% fresh (outside) air.

SERIES SELECTION

Power Inverter Series



Indoor Unit



PCA-RP35/50/60/71/100/125/140KAQ

Outdoor Unit

For Single



PUHZ-ZRP35/50 PUAZ-ZRP60/71 PUAZ-ZRP100/125/140

For Multi (Twin/Triple/Quadruple)



PUHZ-ZRP100/125/140/200/250

Remote Controller



Optional Optional Optional

Standard Inverter Series



Indoor Unit



PCA-RP35/50/60/71/100/125/140KAQ

Outdoor Unit

For Single



SUZ-KA35 SUZ-KA50/60/71 PUHZ-P100 PUHZ-P125/140

For Multi (Twin/Triple/Quadruple)



PUHZ-P100 PUHZ-P125/140 PUHZ-P200/250

Remote Controller



Optional Optional Optional

PCZ-RP KA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																			
	For Single									For Twin					For Triple			For Quadruple		
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
Distribution Pipe	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MSDD-50TR-E	MSDD-50WR-E	MSDT-111R-E	MSDF-1111R-E	-
Standard Inverter (PUHZ-P & SUZ)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4	
Distribution Pipe	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MSDD-50TR-E	MSDD-50WR-E	MSDT-111R-E	MSDF-1111R-E	-

SERIES SELECTION

Power Inverter Series



Indoor Unit



PCA-RP71HAQ

Outdoor Unit

For Single



PUHZ-ZRP71

For Multi (Twin/Triple)



PUHZ-ZRP140/250

Remote Controller



Optional Optional Optional

PCZ-RP HA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																				
	For Single									For Twin					For Triple			For Quadruple			
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250	
Power Inverter (PUHZ-ZRP)	-	-	-	71x1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	71x3	-	-
Distribution Pipe	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MSDD-50TR-E	-	-	MSDT-111R-E	-	-
Standard Inverter (PUHZ-P)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	71x2	-	-	71x3	-	-
Distribution Pipe	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MSDD-50TR-E	-	-	MSDT-111R-E	-	-

PCZ-RP KA SERIES

POWER INVERTER



Type	Inverter Heat Pump										
Indoor Unit	PCA-RP35KAQ	PCA-RP50KAQ	PCA-RP60KAQ	PCA-RP71KAQ	PCA-RP100KAQ		PCA-RP125KAQ		PCA-RP140KAQ		
Outdoor Unit	PUHZ-ZRP35VKA	PUHZ-ZRP50VKA	PUHZ-ZRP60VHA	PUHZ-ZRP71VHA	PUHZ-ZRP100VKA2	PUHZ-ZRP100YKA2	PUHZ-ZRP125VKA2	PUHZ-ZRP125YKA2	PUHZ-ZRP140VKA2	PUHZ-ZRP140YKA2	
Refrigerant	R410A*										
Power Supply	Outdoor power supply VKA · VHA:230 / Single / 50, YKA:400 / Three / 50										
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	12.5	17.5	13.4
	Min - Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0
	Total Input	Rated	kW	0.86	1.34	1.66	1.82	2.42	2.42	3.14	3.14
	EER			-	-	-	-	-	-	-	-
	EEL Rank			-	-	-	-	-	-	-	-
	Design Load		kW	3.6	5.0	6.1	7.1	9.5	12.5	15.4	13.4
	Annual Electricity Consumption ^{*2}		kWh/a	206	292	347	375	553	560	834	882
	SEER			6.1	6.0	6.2	6.6	6.0	5.9	5.2**	5.2**
	Energy Efficiency Class			A++	A+	A++	A++	A+	A+	-	-
	Heating (Average Season)	Capacity	Rated	kW	4.1	5.5	7.0	8.0	11.2	11.2	14.0
Min - Max		kW	1.6-5.2	2.5-6.6	2.8-8.2	3.5-10.2	4.5-14.0	4.5-14.0	5.0-16.0	5.0-16.0	5.7-18.0
Total Input		Rated	kW	1.02	1.45	1.93	2.20	3.04	3.04	3.80	3.80
COP				-	-	-	-	-	-	-	-
EEL Rank				-	-	-	-	-	-	-	-
Design Load			kW	2.4	3.8	4.4	4.7	7.8	7.8	9.3	10.6
Declared Capacity		at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	9.3 (-10°C)	10.6 (-10°C)
at bivalent temperature		kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	9.3 (-10°C)	10.6 (-10°C)	10.6 (-10°C)
at operation limit temperature		kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-11°C)	3.5 (-10°C)	5.8 (-20°C)	5.8 (-20°C)	7.0 (-20°C)	7.0 (-20°C)	7.9 (-20°C)
Back Up Heating Capacity			kW	0	0	0	0	0	0	0	0
Annual Electricity Consumption ^{*2}		kWh/a	815	1257	1458	1519	2837	2837	3097	3366	
SCOP			4.1	4.2	4.3	4.3	3.9	3.9	4.2**	4.2**	
Energy Efficiency Class			A+	A+	A+	A+	A	A	-	-	
Operating Current (max)	Indoor Unit	Input	Rated	A	13.3	13.4	19.4	19.4	27.2	8.7	27.3
	Operating Current (max)	A	0.29	0.37	0.39	0.42	0.65	0.65	0.76	0.76	
	Dimensions <Panel>	H x W x D	mm	230-960-680	230-960-680	230-1280-680	230-1280-680	230-1600-680	230-1600-680	230-1600-680	
	Weight <Panel>	kg	24	25	32	32	36	36	38	39	
	Air Volume	Lo-Mi2-Mi1-Hj	m³/min	10-11-12-14	10-11-13-15	15-16-17-19	16-17-18-20	22-24-26-28	22-24-26-28	23-25-27-29	23-25-27-29
	Sound Level (SPL)	Lo-Mi2-Mi1-Hj	dB(A)	31-33-36-39	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	37-39-41-43	39-41-43-45	39-41-43-45
	Sound Level (PWL)		dB(A)	60	60	60	62	63	63	65	65
	Operating Current (max)	A	13.0	13.0	19.0	19.0	26.5	8.0	26.5	9.5	28.0
	Breaker Size	A	16	16	25	25	32	16	32	16	40
	Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Max. Length		Out-In	m	50	50	50	50	75	75	75	
Max. Height		Out-In	m	30	30	30	30	30	30	30	
Guaranteed Operating Range [Outdoor]	Cooling ^{*3}	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
	Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on where the appliance is used and where it is located.

*3 Optional air protection grade is required where ambient temperature is lower than -5°C. *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

PCZ-P KA SERIES

STANDARD INVERTER



Type	Inverter Heat Pump										
Indoor Unit	PCA-RP35KAQ	PCA-RP50KAQ	PCA-RP60KAQ	PCA-RP71KAQ	PCA-RP100KAQ		PCA-RP125KAQ		PCA-RP140KAQ		
Outdoor Unit	SUZ-KA35VA5	SUZ-KA50VA5	SUZ-KA60VA5	SUZ-KA71VA5	PUHZ-P100VHA4	PUHZ-P100YHA2	PUHZ-P125VHA3	PUHZ-P125YHA	PUHZ-P140VHA3	PUHZ-P140YHA	
Refrigerant	R410A*										
Power Supply	Outdoor power supply VA5 · VHA3 · VHA4:230 / Single / 50, YHA · YHA2:400 / Three / 50										
Cooling	Capacity	Rated	kW	3.6	5.0	5.7	7.1	9.4	12.3	12.3	13.6
	Min - Max	kW	1.4 - 3.9	2.3 - 5.6	2.3 - 6.3	2.8 - 8.1	4.9 - 11.2	4.9 - 11.2	5.5 - 14.0	5.5 - 14.0	5.5 - 15.0
	Total Input	Rated	kW	1.050	1.720	1.720	2.060	3.130	3.130	4.090	4.840
	EER			-	-	-	-	-	-	-	-
	EEL Rank			-	-	-	-	-	-	-	-
	Design Load		kW	3.6	5.0	5.7	7.1	9.4	9.4	12.3	12.3
	Annual Electricity Consumption ^{*2}		kWh/a	214	307	332	414	645	645	845	945
	SEER			5.9	5.7	6.0	6.0	5.1	5.1	4.8	4.8
	Energy Efficiency Class			A+	A+	A+	A+	A	A	B	B
	Heating (Average Season)	Capacity	Rated	kW	4.1	5.5	6.9	7.9	11.2	11.2	14.0
Min - Max		kW	1.7-5.0	1.7-6.6	2.5-8.0	2.6-10.2	4.5-12.5	4.5-12.5	5.0-16.0	5.0-16.0	5.0-18.0
Total Input		Rated	kW	1.130	1.520	1.910	2.180	3.280	3.280	4.120	4.690
COP				-	-	-	-	-	-	-	-
EEL Rank				-	-	-	-	-	-	-	-
Design Load			kW	2.6	4.0	4.8	5.8	8.0	8.0	10.0	11.0
Declared Capacity		at reference design temperature	kW	2.3 (-10°C)	3.6 (-10°C)	4.0 (-10°C)	5.2 (-10°C)	6.3 (-10°C)	6.3 (-10°C)	8.0 (-10°C)	9.0 (-10°C)
at bivalent temperature		kW	2.3 (-7°C)	3.6 (-7°C)	4.3 (-7°C)	5.2 (-7°C)	7.1 (-7°C)	7.1 (-7°C)	8.0 (-7°C)	9.0 (-7°C)	10.0 (-7°C)
at operation limit temperature		kW	2.3 (-10°C)	3.6 (-10°C)	4.0 (-10°C)	5.2 (-10°C)	5.0 (-15°C)	5.0 (-15°C)	5.0 (-15°C)	5.0 (-15°C)	5.0 (-15°C)
Back Up Heating Capacity			kW	0.3	0.4	0.8	0.6	1.7	1.7	2.0	2.0
Annual Electricity Consumption ^{*2}		kWh/a	887	1398	1678	2028	2945	2945	3690	4190	
SCOP			4.1	4.0	4.0	4.0	3.8	3.8	3.4	3.4	
Energy Efficiency Class			A+	A+	A+	A+	A	A	B	B	
Operating Current (max)	Indoor Unit	Input	Rated	A	8.5	12.4	14.4	16.5	28.7	13.7	28.8
	Operating Current (max)	A	0.29	0.37	0.39	0.42	0.65	0.65	0.76	0.76	
	Dimensions <Panel>	H x W x D	mm	230-960-680	230-960-680	230-1280-680	230-1280-680	230-1600-680	230-1600-680	230-1600-680	
	Weight <Panel>	kg	24	25	32	32	36	36	38	39	
	Air Volume	Lo-Mi2-Mi1-Hj	m³/min	10-11-12-14	10-11-13-15	15-16-17-19	16-17-18-20	22-24-26-28	22-24-26-28	23-25-27-29	23-25-27-29
	Sound Level (SPL)	Lo-Mi2-Mi1-Hj	dB(A)	31-33-36-39	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	37-39-41-43	39-41-43-45	39-41-43-45
	Sound Level (PWL)		dB(A)	60	60	60	62	63	63	65	65
	Operating Current (max)	A	8.2	12.0	14.0	16.1	28.0	13.0	28.0	13.0	29.5
	Breaker Size	A	10	20	20	20	32	16	32	16	40
	Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Max. Length		Out-In	m	20	30	30	30	50	50	50	
Max. Height		Out-In	m	12	30	30	30	30	30	30	
Guaranteed Operating Range [Outdoor]	Cooling ^{*3}	°C	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
	Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on where the appliance is used and where it is located.

*3 Optional air protection grade is required where ambient temperature is lower than -5°C. *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

PCZ-RP HA SERIES

POWER INVERTER



Type			Inverter Heat Pump	
Indoor Unit			PCA-RP71HAQ	
Outdoor Unit			PUHZ-RP71VHA	
Refrigerant			R410A*	
Power Supply	Source		Outdoor power supply	
	Outdoor (V/Phase/Hz)		230 / Single / 50	
Cooling	Capacity	Rated	kW	7,1
		Min - Max	kW	3,3 - 8,1
	Total Input	Rated	kW	2,17
	EER			-
	EEL Rank			-
	Design Load		kW	7,1
	Annual Electricity Consumption**		kWh/a	447
SEER			5,6	
	Energy Efficiency Class		A+	
Heating (Average Season)	Capacity	Rated	kW	7,6
		Min - Max	kW	3,5 - 10,2
	Total Input	Rated	kW	2,35
	COP			-
	EEL Rank			-
	Design Load		kW	4,7
	Declared Capacity	at reference design temperature	kW	4,7 (-10°C)
		at bivalent temperature	kW	4,7 (-10°C)
		at operation limit temperature	kW	3,5 (-20°C)
	Back Up Heating Capacity		kW	0
Annual Electricity Consumption**		kWh/a	1751	
SCOP			3,8	
	Energy Efficiency Class		A	
Operating Current (max)		A	19,4	
Indoor Unit	Input	Rated	kW	0,09
	Operating Current (max)		A	0,43
	Dimensions <Panel>	H x W x D	mm	280 - 1136 - 650
	Weight <Panel>		kg	41
	Air Volume (Lo-Hi)		m³/min	17 - 19
	Sound Level (SPL) (Lo-Hi)		dB(A)	34 - 38
	Sound Level (PWL)		dB(A)	56
Outdoor Unit	Dimensions	H x W x D	mm	943 - 960 - 330 (+30)
	Weight		kg	67
	Air Volume	Cooling	m³/min	55,0
		Heating	m³/min	55,0
	Sound Level (SPL)	Cooling	dB(A)	47
		Heating	dB(A)	48
	Sound Level (PWL)	Cooling	dB(A)	67
		Heating	dB(A)	67
	Operating Current (max)		A	19,0
Breaker Size		A	25	
Ext. Piping	Diameter	Liquid / Gas	mm	9,52 / 15,88
	Max. Length	Out-In	m	50
	Max. Height	Out-In	m	30
Guaranteed Operating Range (Outdoor)	Cooling*3	°C	-15 -- +46	
	Heating	°C	-20 -- +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

PSA SERIES


Installation of this floor-standing series is easy and quick.
An excellent choice when there is a sudden need for an air conditioner to be installed.



Quick and Easy Installation, Space-saving and Design That Compliments Any Interior


The floor-standing indoor unit is mounted on the floor, enabling quick installation. Its compact body requires only minimal space.

● PSA-RP71KA

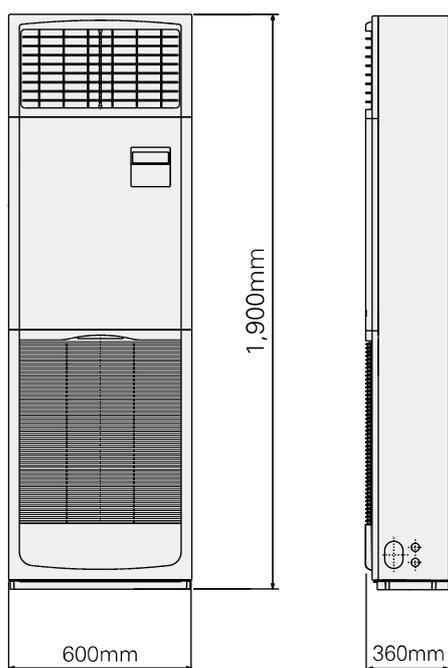

4-way pipe work connections enable greater freedom in installation

Remarkable freedom in choosing installation sites is allowed by providing piping connection to the indoor unit in four places: left side, back, from underneath and on the right side of the unit. Even installation in the corner of a room is easy.

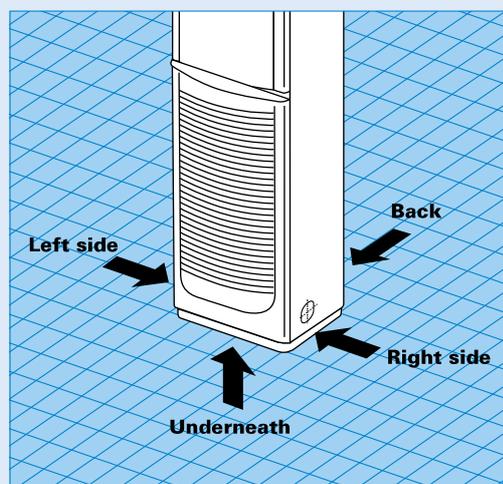

Built-in Remote Controller

Easy Operation with Built-in PAR-21MAA Remote Controller

Icon, letter and number visibility are improved with the adoption of a dot liquid-crystal display (LCD), and operation management functions have been increased.

Main Functions

- Multi-Language Display
- Limited Temperature Range Setting
- Auto-off Timer
- Operation Lock
- Weekly Timer



SERIES SELECTION

Power Inverter Series



Indoor Unit



PSA-RP71/100/125/140KA

Outdoor Unit

For Single



PUAZ-ZRP71



PUAZ-ZRP100/125/140

For Multi (Twin/Triple)



PUAZ-ZRP140/200/250

Remote Controller



Built-in

Standard Inverter Series



Indoor Unit



PSA-RP71/100/125/140KA

Outdoor Unit

For Single



PUAZ-P100



PUAZ-P125/140

For Multi (Twin/Triple)



PUAZ-P140



PUAZ-P200/250

Remote Controller




Built-in

PSZ-RP KA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																			
	For Single								For Twin						For Triple			For Quadruple		
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUAZ-ZRP)	-	-	-	71x1	100x1	125x1	140x1	-	-	-	-	-	71x2	100x2	125x2	-	-	71x3	-	-
Distribution Pipe	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Standard Inverter (PUAZ-P)	-	-	-	-	100x1	125x1	140x1	-	-	-	-	-	71x2	100x2	125x2	-	-	71x3	-	-
Distribution Pipe	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

PSZ-RP SERIES

POWER INVERTER



Type		Inverter Heat Pump								
Indoor Unit		PSA-RP71KA	PSA-RP100KA	PSA-RP125KA	PSA-RP140KA	PSA-RP140KA	PSA-RP140KA	PSA-RP140KA	PSA-RP140KA	
Outdoor Unit		PUHZ-ZRP71VHA	PUHZ-ZRP100VKA2	PUHZ-ZRP100YKA2	PUHZ-ZRP125VKA2	PUHZ-ZRP125YKA2	PUHZ-ZRP140VKA2	PUHZ-ZRP140YKA2	PUHZ-ZRP140YKA2	
Refrigerant		R410A*								
Power Supply		Outdoor power supply								
Source		VKA • VHA:230 / Single / 50, YKA:400 / Three / 50								
Outdoor (V/Phase/Hz)										
Cooling	Capacity	Rated	7.1	9.5	9.5	12.5	12.5	13.4	13.4	
		Min - Max	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0	
	Total Input	Rated	1.89	2.50	2.50	4.09	4.09	4.06	4.06	
	EER		-	-	-	3.06	3.06	3.30	3.30	
		EEL Rank	-	-	-	-	-	-	-	
		Design Load	kW	7.1	9.5	9.5	12.5	12.5	13.4	13.4
Heating (Average Season)	Capacity	Rated	7.6	11.2	11.2	14.0	14.0	16.0	16.0	
		Min - Max	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0	
	Total Input	Rated	2.21	3.08	3.08	4.24	4.24	4.79	4.79	
	COP		-	-	-	3.30	3.30	3.34	3.34	
		EEL Rank	-	-	-	-	-	-	-	
		Design Load	kW	4.7	7.8	7.8	9.3	9.3	10.6	10.6
Operating Current (max)	Input	Rated	A	13.4	17.2	17.2	27.2	27.2	28.7	28.7
		Operating Current (max)	A	0.4	0.71	0.71	0.73	0.73	0.73	0.73
	Dimensions <Panel>	H x W x D	mm	1900 - 600 - 360						
		Weight <Panel>	kg	46	46	46	46	46	48	48
	Air Volume	Lo-Mid-Hi	m³/min	20 - 22 - 24	25 - 28 - 30	25 - 28 - 30	25 - 28 - 31	25 - 28 - 31	25 - 28 - 31	25 - 28 - 31
		Sound Level (SPL) [Lo-Mid-Hi]	dB(A)	40 - 42 - 44	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51
	Sound Level (PWL)	dB(A)		60	65	65	66	66	66	66
		Dimensions	H x W x D	mm	943-950-330(+30)	1338-1050-330(+40)				
	Weight	kg		67	116	123	116	125	118	131
		Air Volume	Cooling	m³/min	55.0	110.0	110.0	120.0	120.0	120.0
	Sound Level (SPL)	Heating	m³/min	55.0	110.0	110.0	120.0	120.0	120.0	120.0
		Cooling	dB(A)	47	49	49	50	50	50	50
Sound Level (PWL)	Heating	dB(A)	48	51	51	52	52	52	52	
	Cooling	dB(A)	67	69	69	70	70	70	70	
Operating Current (max)	A		19.0	32	32	26.5	26.5	28.0	28.0	
	Breaker Size	A	25	32	32	16	16	40	40	
Ext. Piping	Diameter	Liquid / Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max. Length	Out-In	m	50	75	75	75	75	75	
	Max. Height	Out-In	m	30	30	30	30	30	30	
Guaranteed Operating Range [Outdoor]	Cooling*	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
	Heating	°C	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

PSZ-P SERIES

STANDARD INVERTER



Type		Inverter Heat Pump								
Indoor Unit		PSA-RP100KA	PSA-RP100KA	PSA-RP125KA	PSA-RP125KA	PSA-RP140KA	PSA-RP140KA	PSA-RP140KA	PSA-RP140KA	
Outdoor Unit		PUHZ-P100VHA4	PUHZ-P100YHA2	PUHZ-P125VHA3	PUHZ-P125YHA	PUHZ-P140VHA3	PUHZ-P140YHA	PUHZ-P140YHA	PUHZ-P140YHA	
Refrigerant		R410A*								
Power Supply		Outdoor power supply								
Source		VHA3 • VHA4:230 / Single / 50, YHA • YHA2:400 / Three / 50								
Outdoor (V/Phase/Hz)										
Cooling	Capacity	Rated	9.4	9.4	12.3	12.3	13.6	13.6	13.6	
		Min - Max	4.9 - 11.2	4.9 - 11.2	5.5 - 14.0	5.5 - 14.0	5.5 - 15.0	5.5 - 15.0	5.5 - 15.0	
	Total Input	Rated	3.120	3.120	4.380	4.380	5.640	5.640	5.640	
	EER		-	-	2.81	2.81	2.41	2.41	2.41	
		EEL Rank	-	-	C	C	E	E	E	
		Design Load	kW	9.4	9.4	-	-	-	-	
Heating (Average Season)	Capacity	Rated	11.2	11.2	14.0	14.0	16.0	16.0	16.0	
		Min - Max	4.5 - 12.5	4.5 - 12.5	5.0 - 16.0	5.0 - 16.0	5.0 - 18.0	5.0 - 18.0	5.0 - 18.0	
	Total Input	Rated	3.280	3.280	4.980	4.980	5.690	5.690	5.690	
	COP		-	-	2.81	2.81	2.81	2.81	2.81	
		EEL Rank	-	-	D	D	D	D	D	
		Design Load	kW	8.0	8.0	-	-	-	-	
Operating Current (max)	Input	Rated	A	13.7	13.7	28.7	28.7	30.2	30.2	
		Operating Current (max)	A	0.71	0.71	0.73	0.73	0.73	0.73	
	Dimensions <Panel>	H x W x D	mm	1900 - 600 - 360						
		Weight <Panel>	kg	46	46	46	46	48	48	
	Air Volume	Lo-Mid-Hi	m³/min	25 - 28 - 30	25 - 28 - 30	25 - 28 - 31	25 - 28 - 31	25 - 28 - 31	25 - 28 - 31	
		Sound Level (SPL) [Lo-Mid-Hi]	dB(A)	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	
	Sound Level (PWL)	dB(A)		65	65	66	66	66	66	
		Dimensions	H x W x D	mm	943-950-330(+30)	1350-950-330(+30)				
	Weight	kg		77	77	99	101	99	101	
		Air Volume	Cooling	m³/min	60.0	60.0	100.0	100.0	100.0	100.0
	Sound Level (SPL)	Heating	m³/min	60.0	60.0	100.0	100.0	100.0	100.0	
		Cooling	dB(A)	50	50	51	51	52	52	
Sound Level (PWL)	Heating	dB(A)	54	54	55	55	56	56		
	Cooling	dB(A)	70	70	71	71	73	73		
Operating Current (max)	A		28.0	13.0	28.0	13.0	29.5	13.0		
	Breaker Size	A	32	16	32	32	40	16		
Ext. Piping	Diameter	Liquid / Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max. Length	Out-In	m	50	50	50	50	50		
	Max. Height	Out-In	m	30	30	30	30	30		
Guaranteed Operating Range [Outdoor]	Cooling*	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46		
	Heating	°C	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.